


Nominal size		MULTI/JOINT®		Steel size			Ductile size			Cast size	Sewer pipe	Asbestos cement size					
Inch	mm	Range (inch)	Range (mm)	Std steel	IPS PVC	IPS PE	Ductile iron	C900 C909 PVC	DIPS PE	Cast iron	SDR35	A/C ME Class 100	A/C ME Class 150	A/C ME Class 200	A/C RB Class 100	A/C RB Class 150	A/C RB Class 200
2	50	1.811-2.795	46-71		2.38												
2 ½	65	2.480-3.543	63-90		2.88												
3	80	3.307-4.133	84-105		3.50		3.96			3.96		3.74	3.84		4.00	4.10	4.29
4	100	4.094-5.196	104-132		4.50			4.80		5.00	4.22	4.64	4.81		4.79-5.26	4.97-5.32	5.22-5.57
5	125	5.196-6.102	132-155		5.56												
6	150	6.062-7.559	154-192		6.63			6.90		7.10	6.28		6.91		7.05-7.40	7.07-7.37	7.26-7.60
8	200	7.559-9.133	192-232		8.63			9.05		9.30	8.40		9.11		9.22-9.57	9.27-9.62	9.39-9.79
9	225	9.050-10.551	230-268														
10	250	10.500-12.204	267-310		10.75			11.10		11.40	10.50	11.24	11.66		11.25 - 11.77	11.82 - 12.12	11.77 - 12.12
12	300	12.401-14.015	315-356		12.75			13.20		13.50	12.50	13.44	13.92		13.37 - 14.04	14.08 - 14.38	14.03 - 14.38
14	350	13.858-15.472	352-393		14.00			15.30		15.65		15.07	16.22		15.36 - 15.80	16.38 - 16.73	16.44 - 16.88
16	400	15.433-17.047	392-433		16.00			17.40		17.80		17.15	18.46		17.50 - 17.94	18.62 - 18.97	18.74 - 19.19
17	425	17.000-18.267	432-464														
18	450	17.716-18.976	450-482		18.00			19.50		19.92	18.70	19.90	20.94	22.18	20.44	21.20	
19	475	18.937-20.196	481-513														
20	500	19.685-20.944	500-532		20.00			21.60		22.06		22.12	23.28	24.66	22.50	23.54	
22	550	21.574-22.834	548-580														
24	600	23.818-25.078	605-637		24.00			25.80		26.32	24.80	26.48	27.96	29.62	27.17	28.22	
25	625	24.803-26.063	630-662														
27	675	26.181-27.441	665-697														
28	700	27.913-29.173	709-741														
30	750	29.331-30.591	745-777		30.00			32.00		32.40 (C) 32.74 (D)	32.00	33.12	35.00	37.06			
32	800	31.456-32.740	799-831														
34	825	32.952-34.212	837-869														

Please note that actual pipe outside diameters can vary. Please verify the exact pipe O.D. before ordering fittings. The fittings are also suitable for pipe materials that are not listed. Please contact us for more information.  
 MULTI/JOINT® restraint version for water applications: 2" - 16" = wp 232 psi\*, 17" - 33" = wp 150 psi

\* 14" and 16" 150 psi for plastic pipes



Suitable for all materials

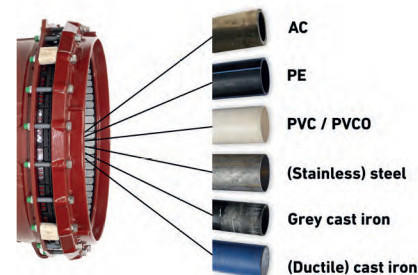

Installation Torque

DN	MULTI/JOINT® size: Inch	Nm	ft-lbf
50	2"	30	20
65	2.5"	40	30
80	3"	60	45
100-125	4-5"	100	75
150-200	6-8"	120	90
225-600	9-24"	140	100
625-825	25"- 33"	140 [non metal] 200 [metal]	100 [non metal] 150 [metal]