

DIASTAR type Six, Ten, TenPlus and Sixteen



Product description

DIASTAR Six

The DIASTAR Six is an affordable solution with a long service life for elastomer diaphragms with up to 6 bar media pressure. The actuator is compact and combines high quality with the basic functions of a pneumatic actuator. It is available with the control function fail safe to close (FC), but does not include any additional accessories.

DIASTAR Ten

Optimally suited for standard applications of up to 10 bar media pressure. Uncomplicated integration into the plant automation possible through the appropriate interface. Available with the control functions fail safe to close (FC), fail safe to open (FO) and double-acting (DA). Option of using PTFE diaphragms for aggressive chemicals.

DIASTAR TenPlus

This actuator is for high performance applications that require high closing forces. Regulation of up to 10 bar media pressure on both sides, such as occurs in ring pipe systems, is possible with this actuator. Available with the control function fail safe to close (FC), as well as in all diaphragm and pipe materials. An accessory interface for simple system integration is integrated.

DIASTAR Sixteen

This is the strongest actuator in the portfolio of GF Piping Systems. The high closing power in combination with the special housing nut guarantees safe regulation of media pressures of up to 16 bar in water applications. The actuator is equipped with an integrated accessory interface for system integration and is also available with the control functions fail safe to close (FC), fail safe to open (FO) and double-acting (DA).

Function

Diaphragm valves from GF Piping Systems are used for regulating, as well as closing, controlling and monitoring volume flows. Especially when transporting contaminated, aggressive or abrasive media, this type of valve has decisive advantages thanks to its simple function and optimized construction. Only the valve body and diaphragm come into contact with the medium.

The valve is suited for use with gases and liquids and can be installed in any location and completely drained. By applying pressure to the actuator, and through the force of the integrated spring assemblies (FC, FO), the position of the diaphragms is controlled and regulated.

Benefits/features

- Full plastic pipe valves without metal screws

- No corrosion caused by aggressive media
- Constant leak-tightness in the event of changes in temperature without tightening screws
- Plastic-appropriate, highly stable connection of upper part and valve body by means of a buttress thread
- Simple regulation via maximum flow and linear characteristic curve
- Optimized diaphragm geometry for a longer lifetime
- 90° rotatable air connection for flexible installation

Possible flow media

Contaminated, containing solids or ultrapure media.


Liquid and gaseous medium which do not negatively affect the physical and chemical properties of the respective housing and diaphragm material during normal mode.

Information on chemical resistance is available from the GF Piping Systems Sales Company or at www.gfps.com.

Applications

- Chemical process industry
- Microelectronics
- Water treatment
- Cooling
- Control applications

Technical data

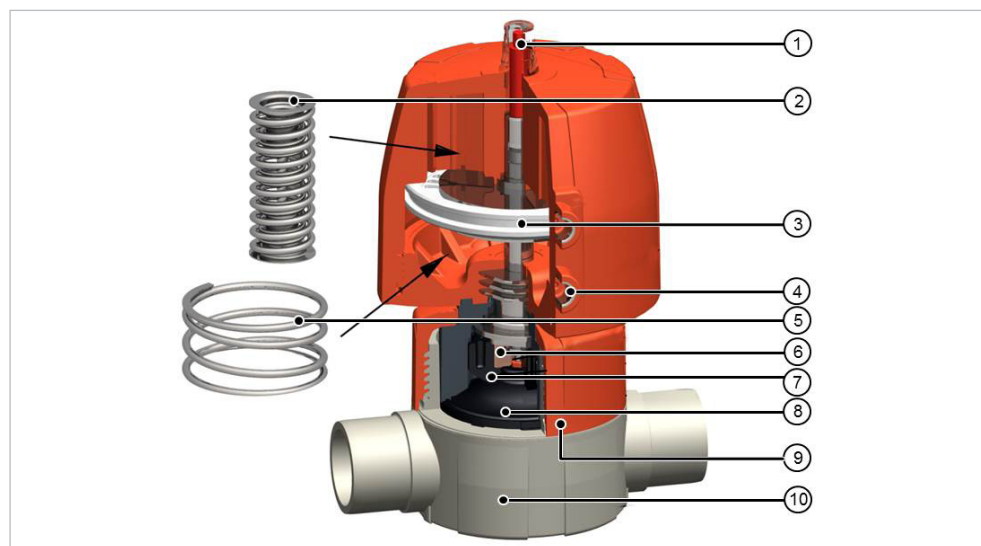

- 1 Optical position indicator with cap
 - 2 Pre-loaded spring assemblies for FC mode
 - 3 Lifting piston
 - 4 Air connections
 - 5 Spring for FO mode
 - 6 Diaphragm holder
 - 7 Pressure piece
 - 8 Diaphragms
 - 9 All-plastic housing
 - 10 Valve body
- DA mode does not use any springs.































Specification

| | | | | | |
|---|--|--|--|-----|------|
| Approved media | Liquid and gaseous media which, in normal operation, do not adversely affect the physical and chemical properties of the respective housing and diaphragm material. Information on chemical resistance is available from the Georg Fischer Sales Company or at www.gfps.com . | | | | |
| Dimensions | Type Six | d20/DN15 – d63/DN50, ½" – 2" | | | |
| | Type Ten | d20/DN15 – d63/DN50, ½" – 2" | | | |
| | Type TenPlus | d20/DN15 – d63/DN50, ½" – 2" | | | |
| | Type Sixteen | d20/DN15 – d63/DN50, ½" – 2" | | | |
| Materials | Valve body | Type Six | PVC-U, PVC-C, ABS, PP-H | | |
| | | Type Ten | PVC-U, PVC-C, ABS, PP-H, PP-N, PVDF, PVDF-HP | | |
| | | Type TenPlus | PVC-U, PVC-C, ABS, PP-H, PP-N, PVDF, PVDF-HP | | |
| | | Type Sixteen | PVC-U, PVC-C, ABS, PVDF, PVDF-HP | | |
| | Housing nut | PPGF 30 for PN10 PPSGF40 for PN16 (only for water applications) | | | |
| | Gasket/ diaphragm¹⁾ | Membrane | NBR | FKM | EPDM |
| | | O-Ring | EPDM | FKM | EPDM |
| Operating temperature²⁾ (valve body material) | PVC-U | 0 to 60 °C | | | |
| | PVC-C | 0 to 80 °C | | | |
| | ABS | -30 to 60 °C | | | |
| | PP | 0 to 80 °C | | | |
| | PVDF | -20 to 140 °C | | | |
| Functions | Type Six | FC | | | |
| | Type Ten | FC, FO, DA | | | |
| | Type TenPlus | FC | | | |
| | Type Sixteen | FC, FO, DA | | | |
| Actuation | Pneumatic | | | | |
| Pressure ratings | Type Six | PN6 | | | |
| | Type Ten | PN10 | | | |
| | Type TenPlus | PN10 on both sides | | | |
| | Type Sixteen | PN16 | | | |
| Approvals | ACS, FDA, DIBt, TA Luft, NAMSA | | | | |
| Product standard | EN ISO 16138 | | | | |
| Test standard | ISO 9393-2, EN 12266-1 (leakage rate A) | | | | |
| Approvals | ACS, FDA, DIBt | | | | |

¹⁾ Other combinations on request.

²⁾ According to pressure-temperature diagram. Temperature ranges may vary depending on the seal material combination.

Actuator sizes DIASTAR

| DN | Six FC | Ten DA/FO/FC | TenPlus FC | Sixteen FC | Sixteen DA/FO |
|----|--|--|--|---|--|
| 15 |  1 |  1 |  2 |  2 |  1 |
| 20 |  2 |  2 |  2 |  2 |  2 |
| 25 |  2 |  2 |  3 |  3 |  2 |
| 32 |  3 |  3 |  4 |  4 |  3 |
| 40 |  3 |  4 |  5 |  5 |  4 |
| 50 |  3 |  4 |  5 |  5 |  4 |

Kv 100 values

Type 514 – 517


| d (mm) | DN (mm) | inch (inch) | kv 100 (l/min) | Cv 100 (US gal/min) | kv 100 (m ³ /h) |
|--------|---------|-------------|------------------------------|---------------------|----------------------------|
| 20 | 15 | ½ | 125 | 9 | 8 |
| 25 | 20 | ¾ | 271 | 19 | 16 |
| 32 | 25 | 1 | 481 | 33 | 29 |
| 40 | 32 | 1 ¼ | 759 | 52 | 45 |
| 50 | 40 | 1 ½ | 1'263 (960 ¹⁾) | 87 | 76 |
| 63 | 50 | 2 | 1'728 (1'181 ¹⁾) | 119 | 104 |

¹⁾ DIASTAR SIX

Type 519


| d (mm) | DN (mm) | Inch (inch) | d1 (mm) | DN1 (mm) | Inch (inch) | kv 100 (l/min) | Cv 100 (US gal/min) | kv 100 (m ³ /h) |
|--------|---------|-------------|---------|----------|-------------|----------------|---------------------|----------------------------|
| 20 | 15 | ½ | 20 | 15 | ½ | 57 | 4 | 3 |
| 25 | 20 | ¾ | 20 | 15 | ½ | 89 | 6 | 5 |
| 25 | 20 | ¾ | 25 | 20 | ¾ | 118 | 8 | 7 |
| 32 | 25 | 1 | 20 | 15 | ½ | 80 | 6 | 5 |
| 32 | 25 | 1 | 25 | 20 | ¾ | 105 | 7 | 6 |
| 32 | 25 | 1 | 32 | 25 | 1 | 231 | 16 | 14 |
| 40 | 32 | 1 ¼ | 20 | 15 | ½ | 85 | 6 | 5 |
| 40 | 32 | 1 ¼ | 25 | 20 | ¾ | 119 | 8 | 7 |
| 40 | 32 | 1 ¼ | 32 | 25 | 1 | 153 | 11 | 9 |
| 40 | 32 | 1 ¼ | 40 | 32 | 1 ¼ | 187 | 13 | 11 |
| 50 | 40 | 1 ½ | 20 | 15 | ½ | 86 | 6 | 5 |
| 50 | 40 | 1 ½ | 25 | 20 | ¾ | 160 | 11 | 10 |
| 50 | 40 | 1 ½ | 32 | 25 | 1 | 206 | 14 | 12 |
| 50 | 40 | 1 ½ | 40 | 32 | 1 ¼ | 524 | 36 | 31 |
| 50 | 40 | 1 ½ | 50 | 40 | 1 ½ | 667 | 46 | 40 |
| 63 | 50 | 2 | 20 | 15 | ½ | 84 | 6 | 5 |
| 63 | 50 | 2 | 25 | 20 | ¾ | 150 | 11 | 9 |
| 63 | 50 | 2 | 32 | 25 | 1 | 184 | 13 | 11 |
| 63 | 50 | 2 | 40 | 32 | 1 ¼ | 471 | 32 | 28 |
| 63 | 50 | 2 | 50 | 40 | 1 ½ | 610 | 42 | 37 |
| 63 | 50 | 2 | 36 | 50 | 2 | 747 | 52 | 45 |
| 90 | 80 | 3 | 20 | 15 | ½ | 82 | 6 | 5 |
| 90 | 80 | 3 | 25 | 20 | ¾ | 103 | 7 | 6 |
| 90 | 80 | 3 | 32 | 25 | 1 | 129 | 9 | 8 |
| 90 | 80 | 3 | 50 | 40 | 1 ½ | 623 | 43 | 37 |
| 90 | 80 | 3 | 36 | 50 | 2 | 696 | 48 | 42 |
| 110 | 100 | 4 | 20 | 15 | ½ | 78 | 5 | 4 |
| 110 | 100 | 4 | 25 | 20 | ¾ | 103 | 7 | 6 |
| 110 | 100 | 4 | 32 | 25 | 1 | 131 | 9 | 8 |
| 110 | 100 | 4 | 50 | 40 | 1 ½ | 604 | 42 | 36 |
| 110 | 100 | 4 | 36 | 50 | 2 | 661 | 46 | 40 |

Flow characteristics type 514 – 517

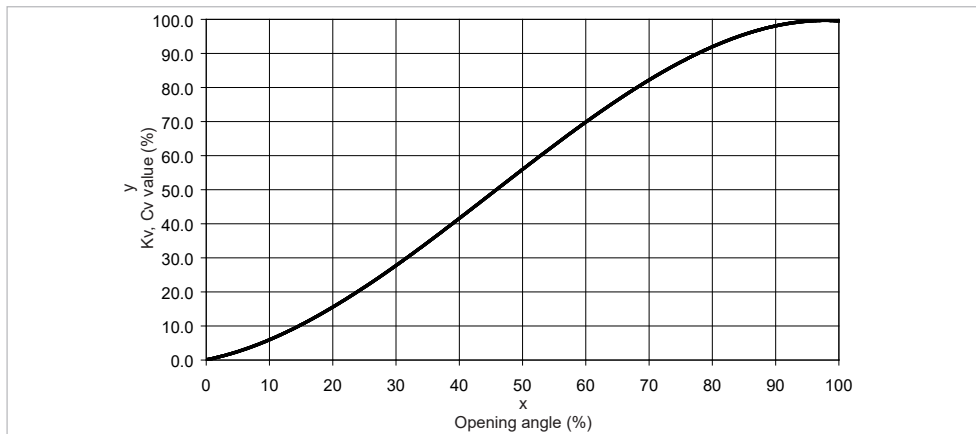

x Open angle (%)
y kv, Cv value (%)

Flow characteristics type 519

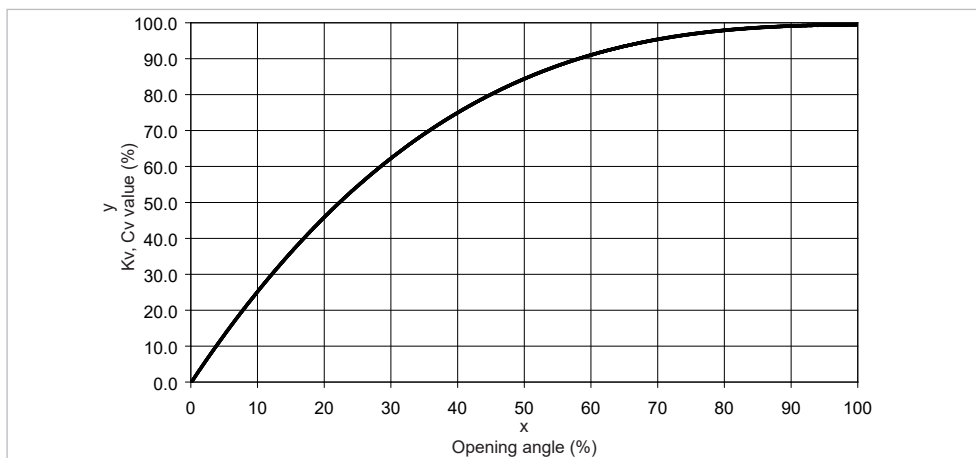

x Open angle (%)
y kv, Cv value (%)


Pressure-temperature diagrams

The following pressure-temperature diagrams are based on a lifetime of 25 years and water or similar media.


T Temperature (°C, °F)

P Permissible pressure (bar, psi)

PVC-U

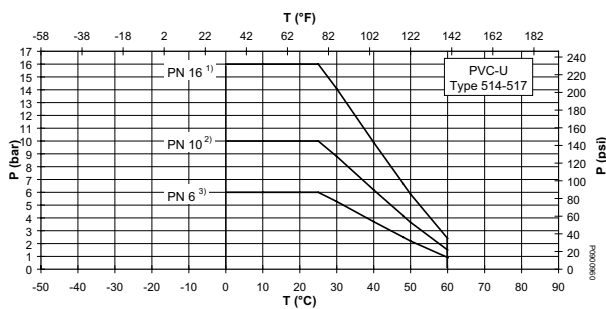


PVC-C

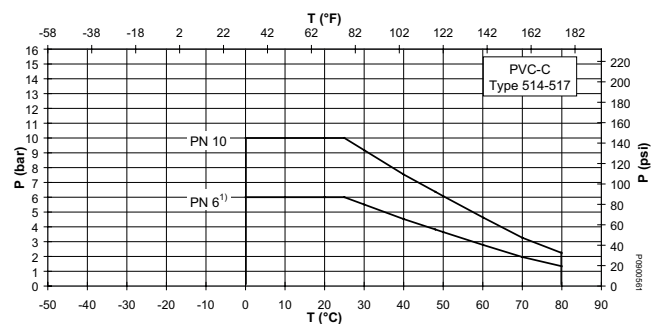

- 1) Only with black housing nut
- 2) Depending on the connection type and actuator, the nominal pressure is reduced to PN10
- 3) Depending on the connection type and actuator, the nominal pressure is reduced to PN6


- 1) Depending on the connection type and actuator, the nominal pressure is reduced to PN6

ABS

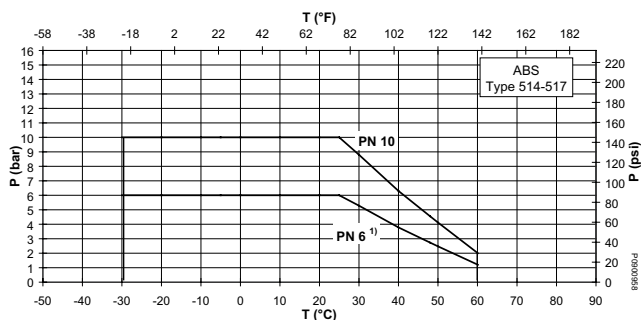


1) Depending on the connection type and actuator, the nominal pressure is reduced to PN6

PP

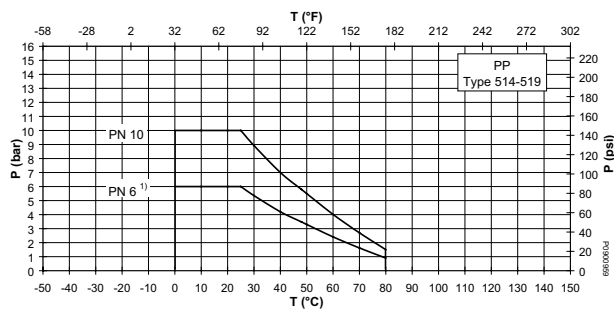


1) Depending on the connection type and actuator, the nominal pressure is reduced to PN6

PVDF

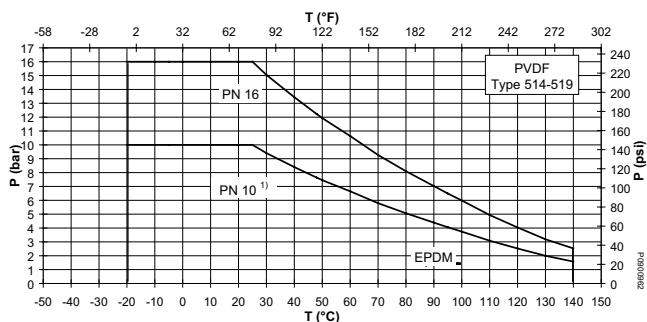

1) PN16 only with black PPS housing nut. Depending on the connection type and actuator, the nominal pressure is reduced to PN10

Pressure losses

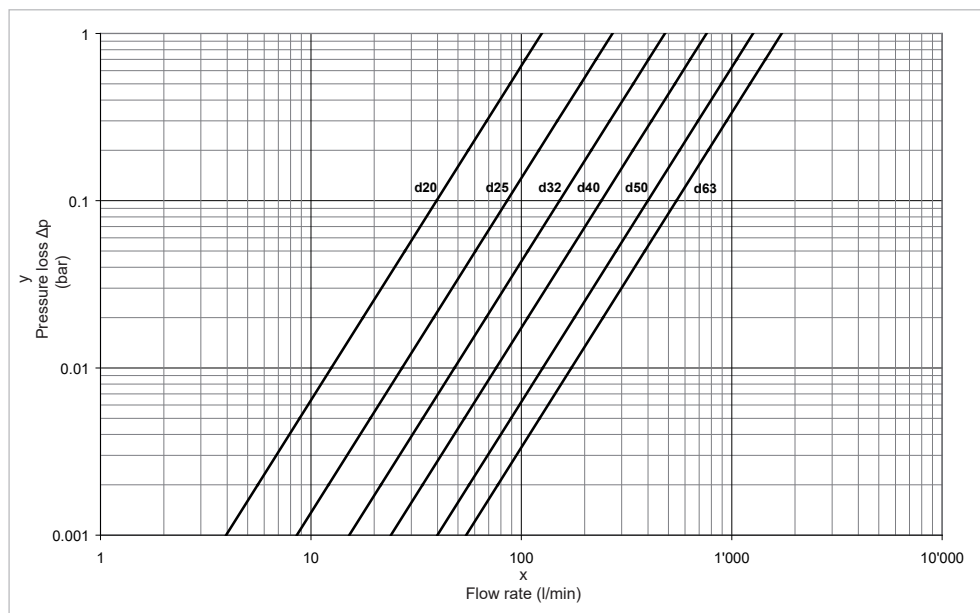

- x Flow rate (l/min, US gal/min)
- y Pressure loss Δp (bar, psi)

Air connection

| | DIASTAR Six (FC) | DIASTAR Ten (FC/FO/DA) | DIASTAR TenPlus (FC) | DIASTAR Sixteen (FC) | (FO/DA) |
|--------|---------------------|---------------------------|-------------------------|-------------------------|---------|
| 20DN15 | G 1/8" | G 1/8" | G 1/8" | G 1/8" | |
| 25DN20 | G 1/8" | G 1/8" | G 1/8" | G 1/8" | |
| 32DN25 | G 1/8" | G 1/8" | G 1/8" | G 1/8" | |
| 40DN32 | G 1/8" | G 1/8" | G 1/4" | G 1/4" | G 1/8" |
| 50DN40 | G 1/8" | G 1/4" | G 1/4" | G 1/4" | |
| 63DN50 | G 1/8" | G 1/4" | G 1/4" | G 1/4" | |

Control volume

| | DIASTAR Six (FC) [dm ³] | DIASTAR Ten (FC) [dm ³] | DIASTAR Ten (FO) [dm ³] | DIASTAR Ten (DA) [dm ³] close | open | DIASTAR TenPlus (FC) [dm ³] | DIASTAR Sixteen (FC) [dm ³] |
|--------|---|--|--|---|------|--|--|
| 20DN15 | 0.04 | 0.04 | 0.07 | 0.07 | 0.04 | 0.10 | 0.10 |
| 25DN20 | 0.12 | 0.12 | 0.20 | 0.20 | 0.12 | 0.12 | 0.12 |
| 32DN25 | 0.12 | 0.12 | 0.23 | 0.23 | 0.12 | 0.22 | 0.22 |
| 40DN32 | 0.24 | 0.24 | 0.44 | 0.44 | 0.24 | 0.40 | 0.40 |
| 50DN40 | 0.24 | 0.42 | 0.86 | 0.86 | 0.42 | 0.70 | 0.70 |
| 63DN50 | 0.24 | 0.44 | 0.86 | 0.86 | 0.44 | 0.80 | 0.80 |

Pressure ratings



DIASTAR Six FC

| Valve body material | PVC-U, PVC-C, ABS, PP-H, PP-N | |
|---------------------|-------------------------------|---|
| | Pressure rating [bar] | Max. control pressure ²⁾ [bar] |
| DN | EPDM ¹⁾ | |
| 20DN15 | 6 | 2.6 |
| 25DN20 | 6 | 3.8 |
| 32DN25 | 6 | 3.8 |
| 40DN32 | 6 | 3.8 |
| 50DN40 | 6 | 3.8 |
| 63DN50 | 6 | 5.5 |
| Medium pressure | → | One sided applied |

¹⁾ Also applies to other elastomer diaphragms such as FKM, NBR, etc.

²⁾ At 0 bar medium pressure.

DIASTAR Ten FC



| Valve body material | PVC-U, PVC-C, ABS, PP-H, PVDF, PVDF-HP, PP-N | | |
|---------------------|---|---|-----|
| | Pressure rating [bar] | Max. control pressure ²⁾ [bar] | |
| DN | EPDM ¹⁾ | PTFE | |
| 20DN15 | 10 | 10/6* | 5.4 |
| 25DN20 | 10 | 10/6* | 5.4 |
| 32DN25 | 10 | 10/6* | 5.4 |
| 40DN32 | 10 | 10/6* | 5.4 |
| 50DN40 | 10 | 10/6* | 5.4 |
| 63DN50 | 10 | 6/5 | 5.4 |
| Medium pressure |  One sided applied |  One sided applied | |

*With medium pressure applied on both sides.

¹⁾ Also applies to other elastomer diaphragms such as FKM, NBR, etc.

²⁾ At 0 bar medium pressure.

DIASTAR Ten FO/DA



| Valve body material | PVC-U, PVC-C, ABS, PP-H, PVDF, PVDF-HP, PP-N | | | |
|---------------------|---|---|--------------------|------|
| | Pressure rating [bar] | Max. control pressure ²⁾ [bar] | | |
| DN | EPDM ¹⁾ | PTFE | EPDM ¹⁾ | PTFE |
| 20DN15 | 10 | 10/6* | 4.5 | 3.5 |
| 25DN20 | 10 | 10/6* | 4.5 | 3 |
| 32DN25 | 10 | 10/6* | 4.5 | 3.5 |
| 40DN32 | 10 | 10/6* | 4.5 | 3.5 |
| 50DN40 | 10 | 10/6* | 3.5 | 3.5 |
| 63DN50 | 10 | 10/6* | 3.5 | 4.5 |
| Medium pressure |  One sided applied |  One sided applied | | |

*With medium pressure applied on both sides.

¹⁾ Also applies to other elastomer diaphragms such as FKM, NBR, etc.

²⁾ At 10 bar medium pressure.

DIASTAR TenPlus FC

| Valve body material | PVC-U, PVC-C, ABS, P-H, PVDF, PVDF-HP | | |
|---------------------|--|--|-----|
| | Pressure rating [bar] | Max. control pressure ²⁾ [bar] | |
| DN | EPDM ¹⁾ | PTFE | |
| 20DN15 | 10 | 10 | 5.4 |
| 25DN20 | 10 | 10 | 5.4 |
| 32DN25 | 10 | 10 | 5.4 |
| 40DN32 | 10 | 10 | 5.4 |
| 50DN40 | 10 | 10 | 5.4 |
| 63DN50 | 10 | 10 | 5.4 |
| Medium pressure |  Both sides applied |  Both sides applied | |

¹⁾ Also applies to other elastomer diaphragms such as FKM, NBR, etc.

²⁾ At 0 bar medium pressure.

DIASTAR Sixteen FC


| Valve body material | PVC-U, PVDF, PVDF-HP | | |
|---------------------|-----------------------|---|-----|
| | Pressure rating [bar] | Max. control pressure ²⁾ [bar] | |
| DN | EPDM ¹⁾ | PTFE | |
| 20DN15 | 16 | 16 | 5.5 |
| 25DN20 | 16 | 16 | 5.5 |
| 32DN25 | 16 | 16 | 5.5 |
| 40DN32 | 16 | 16 | 5.5 |
| 50DN40 | 16 | 16 | 5.5 |
| 63DN50 | 16 | 10 | 5.5 |
| Medium pressure | → One sided applied | → One sided applied | |

¹⁾ Also applies to other elastomer diaphragms such as FKM, NBR, etc.

²⁾ At 0 bar medium pressure.


Control pressure diagrams

DIASTAR Six FC with EPDM* diaphragm

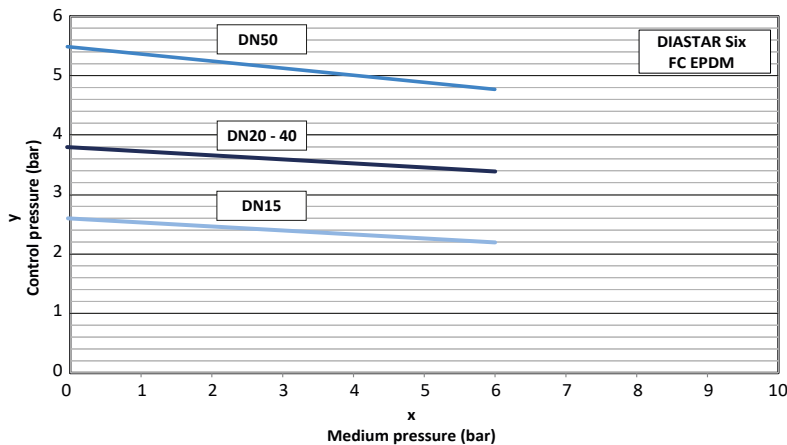


x Media pressure
y Control pressure

DIASTAR Ten FC with EPDM* or PTFE diaphragm

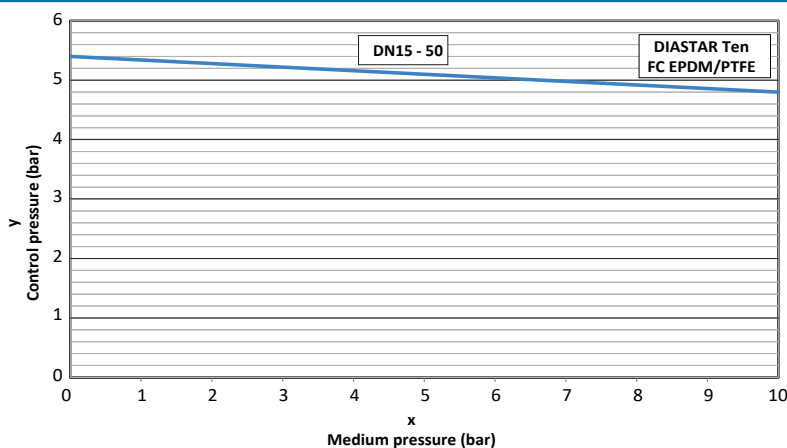

x Media pressure
y Control pressure


DIASTAR Ten FO and DA with EPDM* diaphragm

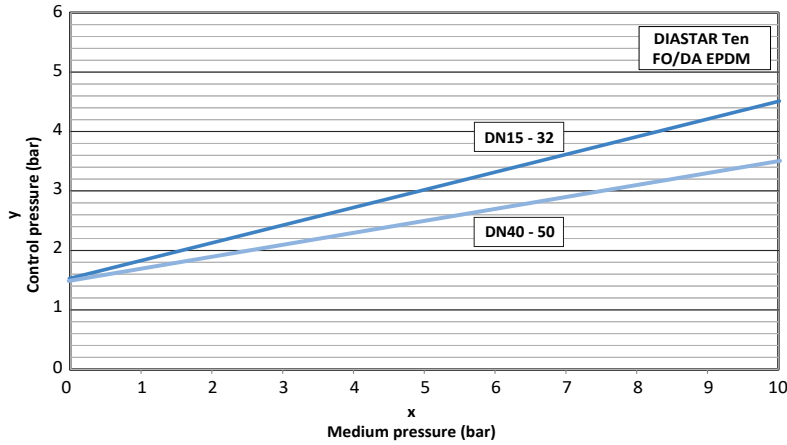

x Media pressure
y Control pressure


* also applies to other elastomer diaphragms such as FKM, NBR, etc.

DIASTAR Ten FO and DA with PTFE diaphragm

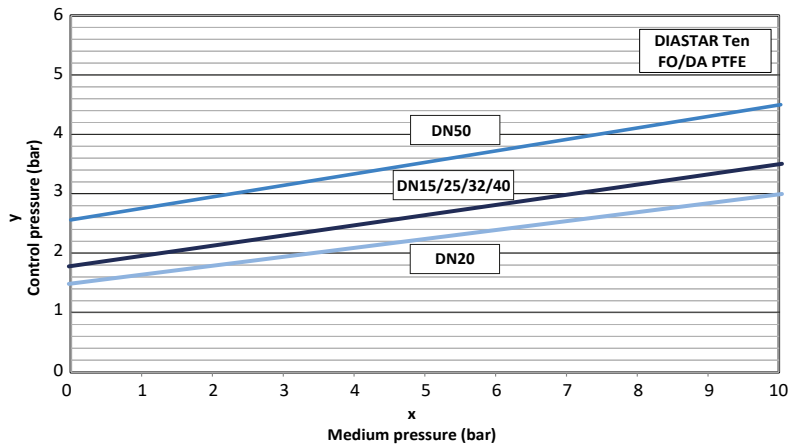


x Media pressure
y Control pressure

DIASTAR TenPlus FC with EPDM* or PTFE diaphragm

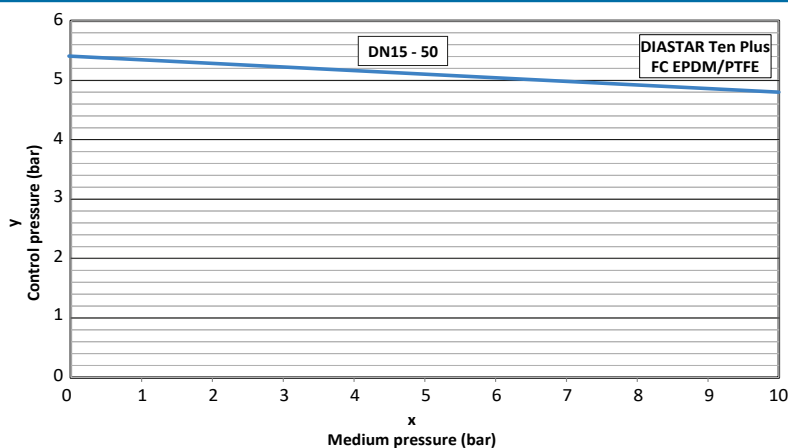

x Media pressure
y Control pressure

DIASTAR Sixteen FC with EPDM* or PTFE diaphragm

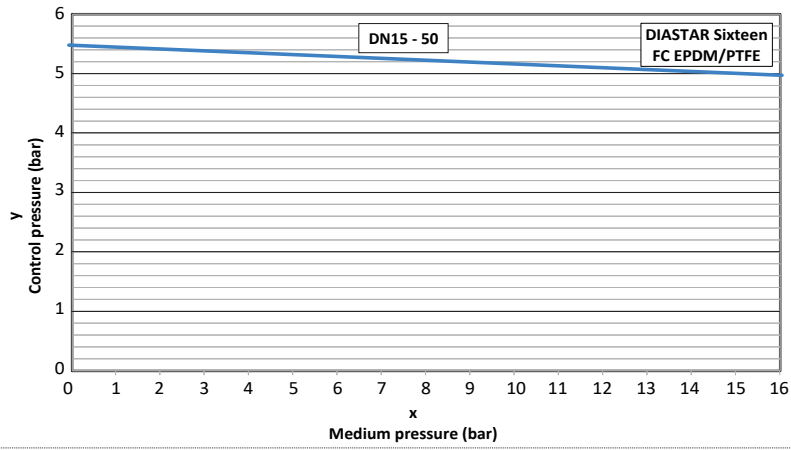


x Media pressure
y Control pressure

* also applies to other elastomer diaphragms such as FKM, NBR, etc.

Valve stroke

Valve stroke

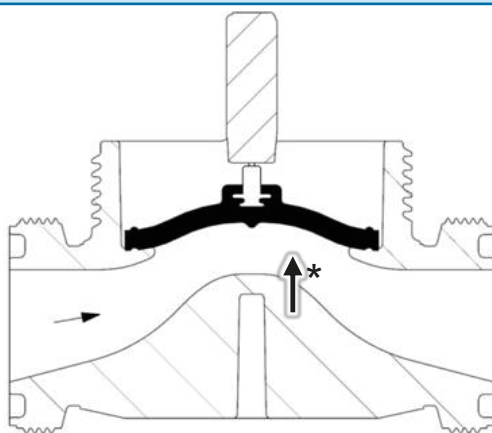

* Max. Valve stroke

| DN (mm) | Actuator Size | Version | Valve stroke Reference (mm) |
|---------|---------------|--------------|-----------------------------|
| 15 | 1 | Six, 604/605 | 6.0 |
| | 1 | Ten | 6.0 |
| | 2 | Sixteen | 6.0 |
| 20 | 2 | Six | 9.0 |
| | 2 | Ten | 9.0 |
| | 2 | Sixteen | 9.0 |
| 25 | 2 | Six | 12.0 |
| | 2 | Ten | 12.0 |
| | 3 | Sixteen | 12.0 |
| 32 | 3 | Six | 14.0 |
| | 3 | Ten | 14.0 |
| | 4 | Sixteen | 14.0 |
| 40 | 3 | Six | 14.0 |
| | 4 | Ten | 14.0 |
| | 5 | Sixteen | 14.0 |
| 50 | 3 | Six | 14.0 |
| | | | 14.0 |
| | | | 14.0 |
| | 4 | Ten | 22.0 |
| | 5 | Sixteen | 22.0 |

Technical basics


The actuators are available with the functions fail safe to close (FC), fail safe to open (FO) and double-acting (DA). The valves have an integrated optical position indicator. The actuator housings are made of PPGF (fiberglass-reinforced polypropylene). Actuators of the FC design have pre-tensioned spring assemblies made of galvanized steel, for safe operation and safe maintenance of the actuator.

i All diaphragm valves are manufactured in accordance with EN ISO 16138. The upper housing made of PPGF (fiberglass-reinforced polypropylene) is screwed together with the lower housing using a central plastic nut, which avoids exposed metal screws.

Indicator for diaphragm material

The color of the index plate on the valve body shows the type of diaphragm material:

| Color | Diaphragm material |
|-------|--------------------|
| Black | EPDM |
| White | PTFE/EPDM |
| Green | PTFE/FKM |
| Red | FKM |
| Blue | NBR |

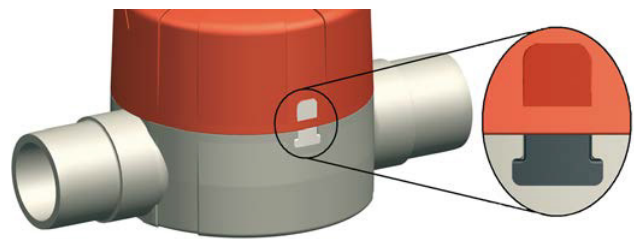

Differentiation in functionalities – FC, FO, DA

| Function | Name |
|----------|-------------------------|
| FC | Fail safe to close |
| FO | Fail safe to open |
| DA | Fail safe double-acting |


| FC mode | FO mode | DA mode |
|---|---|---|
| In the non-operative state, the valve is closed by means of spring resistance. When the actuator is pressurized with the control pressure (bottom connection), the valve opens. When the control pressure escapes, the valve is closed via spring resistance. | In the non-operative state, the valve is opened by means of spring resistance. When the actuator is pressurized with the control pressure (top connection), the valve closes. When the control pressure escapes, the valve is opened via spring resistance. | The valve has no defined basic position. The valve is opened and closed by applying control pressure to the corresponding connection (top connection for closing, bottom connection for opening). |

Selection of the solenoid valve and associated connecting thread


3/2-way solenoid valves are used to control single acting actuators (FC). They are mounted either directly to the actuator using a hollow screw or via a multiple connection plate or valve clusters, as required.

3/2-way solenoid valves are used to control single acting actuators (FO). They are mounted either directly to the actuator using a hollow screw or via a multiple connection plate or valve clusters, as required.


4/2-way or 5/2-way solenoid valves are used to control double-acting actuators (DA). They can be mounted either directly to the actuator using a NAMUR connector plate or via valve clusters.



FC mode with a 3/2-way solenoid valve for bottom connection



FO mode with a 3/2-way solenoid valve for top connection



The DA mode with a 4/2- or 5/2-way solenoid valve. Both connections are used.

Control pressure


| Function FC | Function FO | Function DA |
|--|---|---|
| 6 bar maximum for function FC; low control pressures possible by reducing the spring assemblies. Depending on dimension, see table of pressure stages and control pressure diagrams. | 5 bar maximum for the FO function. For dimension DN50 and from a medium pressure of 10 bar, the max. control pressure is 6 bar. Depending on the dimension, see table of pressure stages and control pressure diagrams. | 5 bar maximum for the DA function. For dimension DN50 and from a medium pressure of 10 bar, the max. control pressure is 6 bar. Depending on the dimension, see table of pressure stages and control pressure diagrams. |
| Compressed air classes (ISO 8573-1) 2 or 3 at -10°C and 3 or 4 at $T > 0^{\circ}\text{C}$ | Compressed air classes (ISO 8573-1) 2 or 3 at -10°C and 3 or 4 at $T > 0^{\circ}\text{C}$ | Compressed air classes (ISO 8573-1) 2 or 3 at -10°C and 3 or 4 at $T > 0^{\circ}\text{C}$ |
| From a medium pressure of 10 bar, the control pressure must be throttled (set actuator operating time to approx. 3s). | From a medium pressure of 10 bar, the exhaust air of the control pressure must be throttled (set actuator operating time to approx. 3s). | From a medium pressure of 10 bar, the exhaust air of the control pressure must be throttled (set actuator operating time to approx. 3s). |
| Temperature of the control medium max. 40°C | Temperature of the control medium max. 40°C | Temperature of the control medium max. 40°C |
| | Depending on the medium pressure, low control pressures can be selected. | Depending on the medium pressure, low control pressures can be selected. |

Note: For optimum valve life, it is recommended to set the control pressure based on the medium pressure - see control pressure diagrams.

Diaphragms

Diaphragms in this Valve type are heavily stressed components. In addition to the mechanical stress caused by wear and tear over several actuating cycles, the diaphragms are also subject to wear and tear due to the flow medium. We strongly recommend that you inspect and, if necessary, replace the diaphragms after 50,000 cycles.


Connections

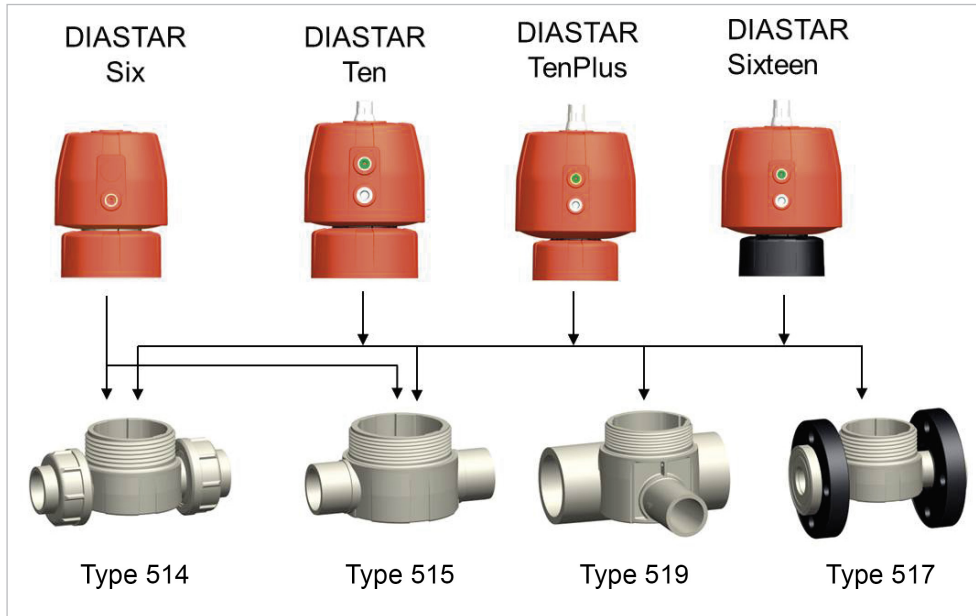


Installation angle for optimal draining of the valve

In order to achieve optimal drainage of these diaphragm valves, GF Piping Systems recommends installing them at the angles (a and b), which correspond to the respective dimension ranges. An installation inclination of about 1° to 2° is not taken into consideration with the stated angles.

| Dimension | Angle a for types 514, 515, 517 |
|-----------|---------------------------------|
| d20/DN15 | 2 |
| d25/DN20 | 2 |
| d32/DN25 | 3 |
| d40/DN32 | 4 |
| d50/DN40 | 5 |
| d63/DN50 | 7 |

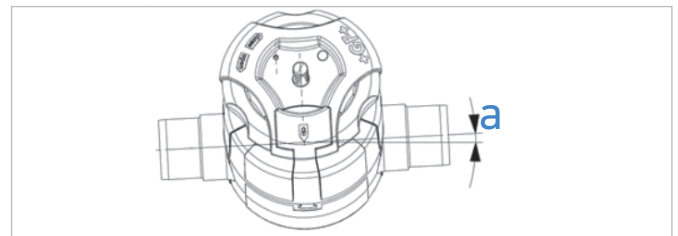


| Dimension | Angle a for types 514, 515, 517 |
|-----------|---------------------------------|
| d20/DN15 | 27 |
| d25/DN20 | 24 |
| d32/DN25 | 25 |
| d40/DN32 | 23 |
| d50/DN40 | 24 |
| d63/DN50 | 22 |

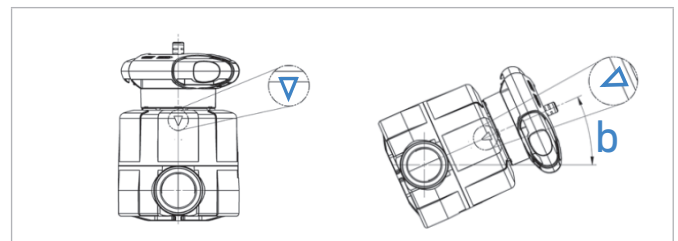

Optimum angle with one of the triangle legs horizontal.

Emptying angle for type 519 is 90°, regardless of the dimension

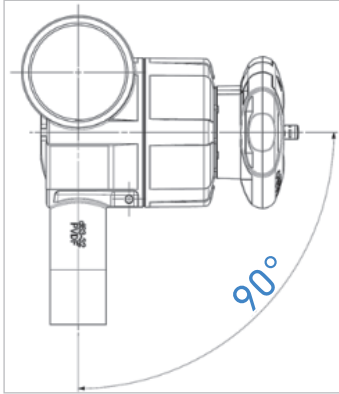

Integrated fastening and PP mounting blocks

Integrated mounting

The diaphragm valve includes an integrated mounting. With this, the forces that can occur when operating the valve (e.g. breakaway torque) are absorbed. Thanks to the integrated mounting, operation forces are not transmitted to the piping system.

PP mounting block for diaphragm valves

The mounting blocks are designed to allow differently sized GF diaphragm valves to be aligned on the same pipe axis by equalizing the different heights from the mounting surface to the pipe axis. The blocks can also be used for the PVC diaphragm Valve type 514 for equalizing the coupling nut with the mounting surface.

- Material: PP-GF15, black
- 5 sizes, numbered from 1 to 5
- Can be plugged together to achieve the desired height

Valve handling

Installation notes

Relation between the pipe pressure and spring assemblies

The closing forces of the actuators were designed for the specified PN pressure level. Operation with low pipe pressure can cause increased diaphragm wear. In order to extend the diaphragm life span, the number of spring assemblies can be reduced. For the specific dimensioning, please contact your representative at GF Piping Systems.



DIASTAR Six

For low pressure applications

- DN20 to DN50
- FC-function
- Cost effective



DIASTAR Ten

All-rounder for standard applications

- DN15 to DN50
- FC-, FO and DA-function



DIASTAR TenPlus

Use only when pressure is applied from both sides


- DN15 to DN50
- FC-function



DIASTAR Sixteen

For water applications with high pressure

- DN15 to DN50
- FC-, FO-, DA-function

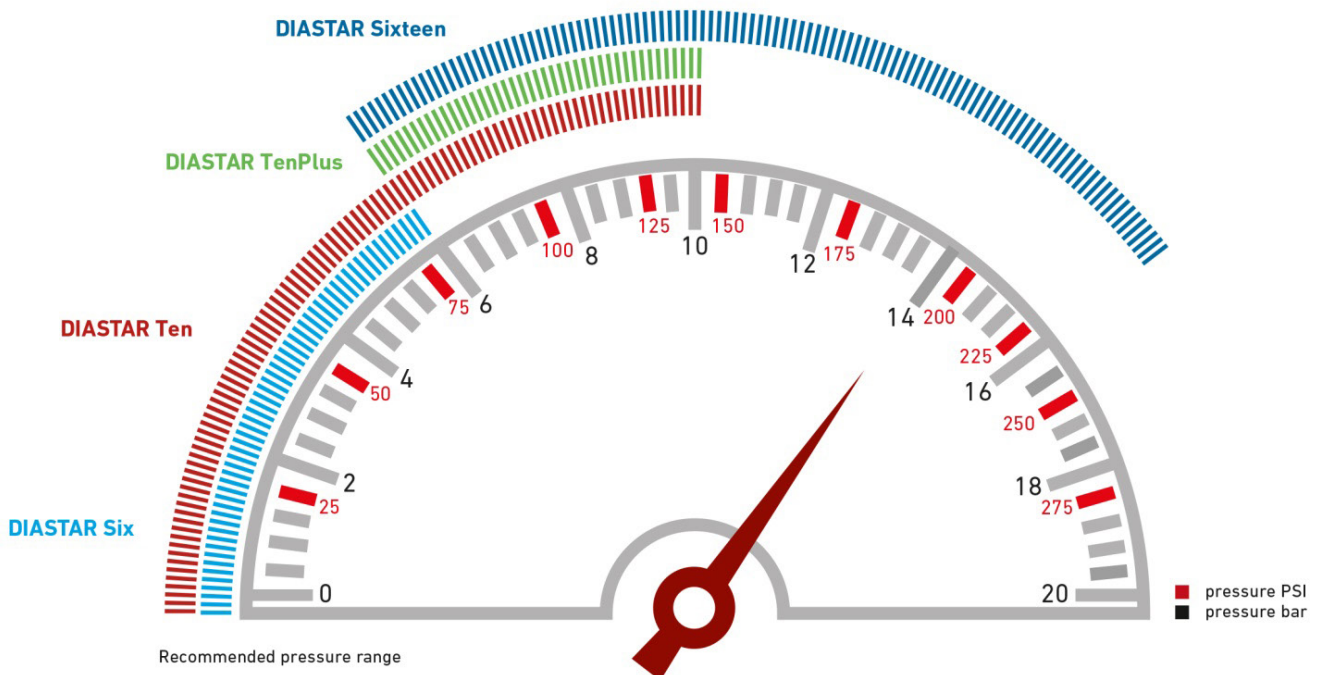

- The pneumatic diaphragm valve DIASTAR Six can be used from 0 to 6 bar. If the pipe pressure is below 2 bar, a reduction in the spring assemblies should be considered.
- The pneumatic diaphragm valve DIASTAR Ten is suitable for use with a pipe pressure from 0 to 10 bar. For optimal valve lifespan, note that the spring assemblies should be reduced in the event of pipe pressures < 2 bar.
- For pipe pressures from 4-6 to 10 bar, DIASTAR TenPlus should be used on both sides.
- The DIASTAR Sixteen should be used for pipe pressures between 6 and 16 bar. When using with a pipe pressure below 8 bar, the adjustment of the spring assemblies is recommend.

Ensure that the diaphragm valve and the spring assemblies are each designed in accordance with the medium pressure. Reducing the spring assemblies leads to a reduced closing force. When the medium pressure rises, the valve cannot close or cannot close completely if spring assemblies are missing. This can have a negative impact on the process.

Maintenance notes

We recommend regular inspection of the diaphragm and the valve body, at the latest after:

- 100,000 operations at less than 10 bar nominal pressure at 20 °C with water
- 50,000 operations at more than 10 bar nominal pressure at 20 °C with water

Should the flow medium show increased temperatures, chemicals, or particles that cause abrasion, we recommend more frequent monitoring. The diaphragm can be controlled by professionally dismantling the housing nut.



Installation and maintenance must be performed in accordance with the corresponding installation manual. The installation manual can be downloaded via the QR code on the enclosed quick start guide, see also the online product catalog at www.gfps.com

Tips for installation

- The direction of flow and mounting position may be chosen freely.





Dimensions

Type 514

Type 515

Type 517

Type 519

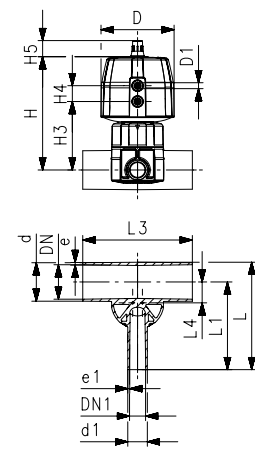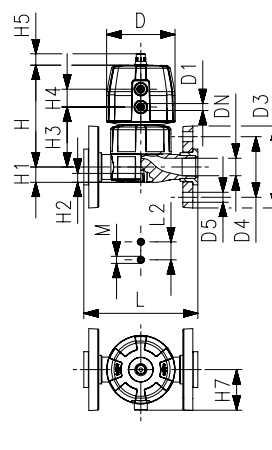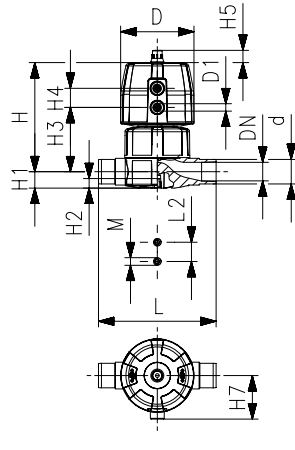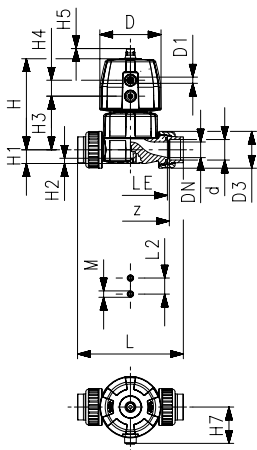

DIASTAR Six FC (Type 514 – 517)

| Dim. (mm) | DN (mm) | Inch (inch) | D (mm) | D1 (inch) | D4 (mm) | D5 (mm) | L(1) (mm) | L(2) (mm) | L(3) (mm) | L(4) (mm) | L(5) (mm) | L(6) (mm) | L(7) (mm) |
|-----------|---------|-------------|--------|-----------|---------|---------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 20 | 15 | 1/2 | 68 | 1/8 | 65 | 14 | 128 | 128 | 128 | 224 | 196 | 124 | 124 |
| 25 | 20 | 3/4 | 96 | 1/8 | 75 | 14 | 152 | 152 | 150 | 250 | 221 | 144 | 144 |
| 32 | 25 | 1 | 96 | 1/8 | 85 | 14 | 166 | 166 | 162 | 262 | 234 | 154 | 154 |
| 40 | 32 | 1 1/4 | 120 | 1/8 | 100 | 18 | 192 | 192 | 184 | 296 | 260 | 174 | 174 |
| 50 | 40 | 1 1/2 | 120 | 1/8 | 110 | 18 | 222 | 222 | 210 | 328 | 284 | 194 | 194 |
| 63 | 50 | 2 | 120 | 1/8 | 125 | 18 | 266 | 266 | 248 | 370 | 321 | 224 | 224 |

| Dim. (mm) | DN (mm) | Inch (inch) | L(8) (mm) | L(9) (mm) | L2 (mm) | H (mm) | H1 (mm) | H2 (mm) | H3 (mm) | H7 (mm) | M | Z (mm) | LE (mm) | z for L(3) | Hx (mm) |
|-----------|---------|-------------|-----------|-----------|---------|--------|---------|---------|---------|---------|----|--------|---------|------------|---------|
| 20 | 15 | 1/2 | 124 | 130 | 25 | 101 | 14 | 12 | 60 | 43 | M6 | 96 | 90 | 100 | 7 |
| 25 | 20 | 3/4 | 144 | 150 | 25 | 132 | 18 | 12 | 73 | 57 | M6 | 114 | 108 | 118 | 10 |
| 32 | 25 | 1 | 154 | 160 | 25 | 143 | 22 | 12 | 84 | 57 | M6 | 122 | 116 | 126 | 13 |
| 40 | 32 | 1 1/4 | 174 | 180 | 45 | 173 | 26 | 15 | 99 | 69 | M8 | 140 | 134 | 144 | 14 |
| 50 | 40 | 1 1/2 | 194 | 200 | 45 | 193 | 32 | 15 | 119 | 69 | M8 | 160 | 154 | 164 | 16 |
| 63 | 50 | 2 | 224 | 230 | 45 | 205 | 39 | 15 | 132 | 69 | M8 | 190 | 184 | 194 | 16 |

DIASTAR Ten FC (Type 514 – 517)

| Dim. (mm) | DN (mm) | Inch (inch) | D (mm) | D1 (inch) | D4 (mm) | D5 (mm) | L(1) (mm) | L(2) (mm) | L(3) (mm) | L(4) (mm) | L(5) (mm) | L(6) (mm) | L(7) (mm) | L(8) (mm) |
|-----------|---------|-------------|--------|-----------|---------|---------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 20 | 15 | 1/2 | 68 | 1/8 | 65 | 14 | 128 | 128 | 128 | 224 | 196 | 124 | 124 | 124 |
| 25 | 20 | 3/4 | 96 | 1/8 | 75 | 14 | 152 | 152 | 150 | 250 | 221 | 144 | 144 | 144 |
| 32 | 25 | 1 | 96 | 1/8 | 85 | 14 | 166 | 166 | 162 | 262 | 234 | 154 | 154 | 154 |
| 40 | 32 | 1 1/4 | 120 | 1/8 | 100 | 18 | 192 | 192 | 184 | 296 | 260 | 174 | 174 | 174 |
| 50 | 40 | 1 1/2 | 150 | 1/4 | 110 | 18 | 222 | 222 | 210 | 328 | 284 | 194 | 194 | 194 |
| 63 | 50 | 2 | 150 | 1/4 | 125 | 18 | 266 | 266 | 248 | 370 | 321 | 224 | 224 | 224 |

| Dim. (mm) | DN (mm) | Inch (inch) | L(9) (mm) | L2 (mm) | H (mm) | H1 (mm) | H2 (mm) | H3 (mm) | H4 (mm) | H5 (mm) | H7 (mm) | M | z (mm) | LE (mm) | z for L(3) | Hx (mm) |
|-----------|---------|-------------|-----------|---------|--------|---------|---------|---------|---------|---------|---------|----|--------|---------|------------|---------|
| 20 | 15 | 1/2 | 130 | 25 | 101 | 14 | 12 | 60 | 24 | 16 | 43 | M6 | 96 | 90 | 100 | 7 |
| 25 | 20 | 3/4 | 150 | 25 | 132 | 18 | 12 | 73 | 25 | 16 | 57 | M6 | 114 | 108 | 118 | 10 |
| 32 | 25 | 1 | 160 | 25 | 143 | 22 | 12 | 84 | 25 | 16 | 57 | M6 | 122 | 116 | 126 | 13 |
| 40 | 32 | 1 1/4 | 180 | 45 | 173 | 26 | 15 | 99 | 26 | 26 | 69 | M8 | 140 | 134 | 144 | 15 |
| 50 | 40 | 1 1/2 | 200 | 45 | 214 | 32 | 15 | 119 | 36 | 26 | 88 | M8 | 160 | 154 | 164 | 19 |
| 63 | 50 | 2 | 230 | 45 | 226 | 39 | 15 | 132 | 36 | 26 | 88 | M8 | 190 | 184 | 194 | 23 |

DIASTAR Ten FO/DA (Type 514 – 517)

| Dim. (mm) | DN (mm) | Inch (inch) | D (mm) | D1 (inch) | D4 (mm) | D5 (mm) | L(1) (mm) | L(2) (mm) | L(3) (mm) | L(4) (mm) | L(5) (mm) | L(6) (mm) | L(7) (mm) | L(8) (mm) |
|-----------|---------|-------------|--------|-----------|---------|---------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 20 | 15 | ½ | 68 | ⅛ | 65 | 14 | 128 | 128 | 128 | 224 | 196 | 124 | 124 | 124 |
| 25 | 20 | ¾ | 96 | ⅛ | 75 | 14 | 152 | 152 | 150 | 250 | 221 | 144 | 144 | 144 |
| 32 | 25 | 1 | 96 | ⅛ | 85 | 14 | 166 | 166 | 168 | 262 | 234 | 154 | 154 | 154 |
| 40 | 32 | 1 ¼ | 120 | ⅛ | 100 | 18 | 192 | 192 | 184 | 296 | 260 | 174 | 174 | 174 |
| 50 | 40 | 1 ½ | 150 | ¼ | 110 | 18 | 222 | 222 | 210 | 328 | 284 | 194 | 194 | 194 |
| 63 | 50 | 2 | 150 | ¼ | 125 | 18 | 266 | 266 | 248 | 370 | 321 | 224 | 224 | 224 |

| Dim. (mm) | DN (mm) | Inch (inch) | L(9) (mm) | L2 (mm) | H (mm) | H1 (mm) | H2 (mm) | H3 (mm) | H4 (mm) | H5 (mm) | H7 (mm) | M | z (mm) | LE | z for L(3) | Hx (mm) |
|-----------|---------|-------------|-----------|---------|--------|---------|---------|---------|---------|---------|---------|----|--------|-----|------------|---------|
| 20 | 15 | ½ | 130 | 25 | 101 | 14 | 12 | 60 | 24 | 16 | 43 | M6 | 96 | 90 | 100 | 7 |
| 25 | 20 | ¾ | 150 | 25 | 132 | 18 | 12 | 73 | 25 | 16 | 57 | M6 | 114 | 108 | 118 | 10 |
| 32 | 25 | 1 | 160 | 25 | 147 | 22 | 12 | 84 | 25 | 16 | 57 | M6 | 122 | 116 | 126 | 13 |
| 40 | 32 | 1 ¼ | 180 | 45 | 173 | 26 | 15 | 99 | 26 | 26 | 69 | M8 | 140 | 134 | 144 | 15 |
| 50 | 40 | 1 ½ | 200 | 45 | 214 | 32 | 15 | 119 | 36 | 26 | 88 | M8 | 160 | 154 | 164 | 19 |
| 63 | 50 | 2 | 230 | 45 | 226 | 39 | 15 | 132 | 36 | 26 | 88 | M8 | 190 | 184 | 194 | 23 |

DIASTAR Ten FO/DA (Type 519)

| Dim. (mm) | d1 (mm) | DN (mm) | inch (inch) | DN1 (mm) | Inch1 (") | DN2 (mm) | Inch2 (inch) | D (mm) | D1 (inch) | L(6) (mm) | L1 (mm) | L3 (mm) | L4 (mm) | H (mm) | H3 (mm) | H4 (mm) | H5 (mm) | Hx (mm) |
|-----------|---------|---------|-------------|----------|-----------|----------|--------------|--------|-----------|-----------|---------|---------|---------|--------|---------|---------|---------|---------|
| 20 | 20 | 15 | ½ | 15 | ½ | 15 | ½ | 68 | ⅛ | 117 | 96 | 162 | 12 | 104 | 63 | 24 | 16 | 7 |
| 25 | 20 | 20 | ¾ | 15 | ½ | 20 | ¾ | 96 | ⅛ | 133 | 108 | 162 | 16 | 131 | 73 | 25 | 16 | 10 |
| 25 | 25 | 20 | ¾ | 20 | ¾ | 20 | ¾ | 96 | ⅛ | 133 | 108 | 162 | 16 | 131 | 73 | 25 | 16 | 10 |
| 32 | 20 | 25 | 1 | 15 | ½ | 20 | ¾ | 96 | ⅛ | 142 | 120 | 162 | 19 | 135 | 76 | 25 | 16 | 10 |
| 32 | 25 | 25 | 1 | 20 | ¾ | 20 | ¾ | 96 | ⅛ | 142 | 120 | 162 | 19 | 135 | 76 | 25 | 16 | 10 |
| 32 | 32 | 25 | 1 | 25 | 1 | 25 | 1 | 96 | ⅛ | 145 | 120 | 160 | 19 | 143 | 84 | 25 | 16 | 13 |
| 40 | 20 | 32 | 1 ¼ | 15 | ½ | 25 | 1 | 96 | ⅛ | 149 | 128 | 180 | 23 | 151 | 92 | 25 | 16 | 13 |
| 40 | 25 | 32 | 1 ¼ | 20 | ¾ | 25 | 1 | 96 | ⅛ | 149 | 128 | 180 | 23 | 151 | 92 | 25 | 16 | 13 |
| 40 | 32 | 32 | 1 ¼ | 25 | 1 | 25 | 1 | 96 | ⅛ | 149 | 128 | 180 | 23 | 151 | 92 | 25 | 16 | 13 |
| 40 | 40 | 32 | 1 ¼ | 32 | 1 ¼ | 25 | 1 | 96 | ⅛ | 174 | 153 | 180 | 23 | 151 | 92 | 25 | 16 | 13 |
| 50 | 20 | 40 | 1 ½ | 15 | ½ | 20 | ¾ | 96 | ⅛ | 160 | 134 | 180 | 27 | 148 | 90 | 25 | 16 | 10 |
| 50 | 25 | 40 | 1 ½ | 20 | ¾ | 25 | 1 | 96 | ⅛ | 160 | 134 | 180 | 28 | 156 | 97 | 25 | 16 | 13 |
| 50 | 32 | 40 | 1 ½ | 25 | 1 | 25 | 1 | 96 | ⅛ | 160 | 134 | 180 | 28 | 156 | 97 | 25 | 16 | 13 |
| 50 | 40 | 40 | 1 ½ | 32 | 1 ¼ | 50 | 2 | 150 | ¼ | 209 | 169 | 209 | 33 | 224 | 129 | 36 | 26 | 23 |
| 50 | 50 | 40 | 1 ½ | 40 | 1 ½ | 50 | 2 | 150 | ¼ | 209 | 169 | 209 | 33 | 224 | 129 | 36 | 26 | 23 |
| 63 | 20 | 50 | 2 | 15 | ½ | 20 | ¾ | 96 | ⅛ | 177 | 144 | 180 | 33 | 155 | 96 | 25 | 16 | 10 |
| 63 | 25 | 50 | 2 | 20 | ¾ | 25 | 1 | 96 | ⅛ | 177 | 144 | 180 | 35 | 163 | 104 | 25 | 16 | 13 |
| 63 | 32 | 50 | 2 | 25 | 1 | 25 | 1 | 96 | ⅛ | 177 | 144 | 180 | 35 | 163 | 104 | 25 | 16 | 13 |
| 63 | 40 | 50 | 2 | 32 | 1 ¼ | 50 | 2 | 150 | ¼ | 225 | 192 | 220 | 39 | 230 | 136 | 36 | 26 | 23 |
| 63 | 50 | 50 | 2 | 40 | 1 ½ | 50 | 2 | 150 | ¼ | 225 | 192 | 220 | 39 | 230 | 136 | 36 | 26 | 23 |
| 63 | 63 | 50 | 2 | 50 | 2 | 50 | 2 | 150 | ¼ | 225 | 192 | 220 | 39 | 230 | 136 | 36 | 26 | 23 |
| 90 | 20 | 80 | 3 | 15 | ½ | 25 | 1 | 96 | ⅛ | 205 | 159 | 190 | 47 | 176 | 117 | 25 | 16 | 13 |
| 90 | 25 | 80 | 3 | 20 | ¾ | 25 | 1 | 96 | ⅛ | 205 | 159 | 190 | 47 | 176 | 117 | 25 | 16 | 13 |
| 90 | 32 | 80 | 3 | 25 | 1 | 25 | 1 | 96 | ⅛ | 205 | 159 | 190 | 47 | 176 | 117 | 25 | 16 | 13 |
| 90 | 50 | 80 | 3 | 40 | 1 ½ | 50 | 2 | 150 | ¼ | 254 | 207 | 250 | 51 | 244 | 150 | 36 | 26 | 23 |
| 90 | 63 | 80 | 3 | 50 | 2 | 50 | 2 | 150 | ¼ | 254 | 207 | 250 | 51 | 244 | 150 | 36 | 26 | 23 |
| 110 | 20 | 100 | 4 | 15 | ½ | 25 | 1 | 96 | ⅛ | 227 | 171 | 190 | 56 | 185 | 126 | 25 | 16 | 13 |
| 110 | 25 | 100 | 4 | 20 | ¾ | 25 | 1 | 96 | ⅛ | 227 | 171 | 190 | 56 | 185 | 126 | 25 | 16 | 13 |
| 110 | 32 | 100 | 4 | 25 | 1 | 25 | 1 | 96 | ⅛ | 277 | 171 | 190 | 56 | 185 | 126 | 25 | 16 | 13 |
| 110 | 50 | 100 | 4 | 40 | 1 ½ | 50 | 2 | 150 | ¼ | 276 | 219 | 250 | 60 | 254 | 160 | 36 | 26 | 23 |
| 110 | 63 | 100 | 4 | 50 | 2 | 50 | 2 | 150 | ¼ | 276 | 219 | 250 | 60 | 254 | 160 | 36 | 26 | 23 |

DIASTAR TenPlus FC (Type 514 – 517)

| Dim. (mm) | DN (mm) | Inch (inch) | D (mm) | D1 (inch) | D4 (mm) | D5 (mm) | L(1) (mm) | L(2) (mm) | L(3) (mm) | L(4) (mm) | L(5) (mm) | L(6) (mm) | L(7) (mm) | L(8) (mm) |
|-----------|---------|-------------|--------|-----------|---------|---------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 20 | 15 | ½ | 96 | ⅛ | 65 | 14 | 128 | 128 | 128 | 224 | 196 | 124 | 124 | 124 |
| 25 | 20 | ¾ | 96 | ⅛ | 75 | 14 | 152 | 152 | 152 | 250 | 221 | 144 | 144 | 144 |
| 32 | 25 | 1 | 120 | ⅛ | 85 | 14 | 166 | 166 | 166 | 262 | 234 | 154 | 154 | 154 |
| 40 | 32 | 1 ¼ | 150 | ¼ | 100 | 18 | 192 | 192 | 192 | 296 | 260 | 174 | 174 | 174 |
| 50 | 40 | 1 ½ | 180 | ¼ | 110 | 18 | 222 | 222 | 222 | 328 | 284 | 194 | 194 | 194 |
| 63 | 50 | 2 | 180 | ¼ | 125 | 18 | 266 | 266 | 266 | 370 | 321 | 224 | 224 | 224 |

| Dim. (mm) | DN (mm) | Inch (inch) | L(9) (mm) | l2 (mm) | H (mm) | H1 (mm) | H2 (mm) | H3 (mm) | H4 (mm) | H5 (mm) | H7 (mm) | M | z (mm) | z for L(3) | Hx (mm) |
|-----------|---------|-------------|-----------|---------|--------|---------|---------|---------|---------|---------|---------|----|--------|------------|---------|
| 20 | 15 | ½ | 130 | 25 | 127 | 14 | 12 | 68 | 25 | 16 | 57 | M6 | 96 | 100 | 7 |
| 25 | 20 | ¾ | 150 | 25 | 132 | 18 | 12 | 73 | 25 | 16 | 57 | M6 | 114 | 118 | 10 |
| 32 | 25 | 1 | 160 | 25 | 167 | 22 | 12 | 93 | 26 | 26 | 69 | M6 | 122 | 126 | 13 |
| 40 | 32 | 1 ¼ | 180 | 45 | 196 | 26 | 15 | 101 | 36 | 26 | 88 | M8 | 140 | 144 | 15 |
| 50 | 40 | 1 ½ | 200 | 45 | 239 | 32 | 15 | 124 | 37 | 26 | 103 | M8 | 160 | 164 | 19 |
| 63 | 50 | 2 | 230 | 45 | 251 | 39 | 15 | 137 | 37 | 26 | 103 | M8 | 190 | 194 | 23 |

DIASTAR TenPlus FC (Type 519)

| Dim. (mm) | d1 (mm) | DN (mm) | Inch (inch) | DN1 (mm) | Inch1 (inch) | DN2 (mm) | Inch2 (inch) | D (mm) | D1 (inch) | L(6) (mm) | L1 (mm) | L3 (mm) | L4 (mm) | H (mm) | H3 (mm) | H4 (mm) | H5 (mm) | Hx (mm) |
|-----------|---------|---------|-------------|----------|--------------|----------|--------------|--------|-----------|-----------|---------|---------|---------|--------|---------|---------|---------|---------|
| 20 | 20 | 15 | ½ | 15 | ½ | 15 | ½ | 96 | ⅛ | 117 | 96 | 162 | 12 | 103 | 71 | 25 | 16 | 7 |
| 25 | 20 | 20 | ¾ | 15 | ½ | 20 | ¾ | 96 | ⅛ | 133 | 108 | 162 | 16 | 131 | 72 | 25 | 16 | 10 |
| 25 | 25 | 20 | ¾ | 20 | ¾ | 20 | ¾ | 96 | ⅛ | 133 | 108 | 162 | 16 | 131 | 72 | 25 | 16 | 10 |
| 32 | 20 | 25 | 1 | 15 | ½ | 20 | ¾ | 96 | ⅛ | 142 | 120 | 162 | 19 | 135 | 76 | 25 | 16 | 10 |
| 32 | 25 | 25 | 1 | 20 | ¾ | 20 | ¾ | 96 | ⅛ | 142 | 120 | 162 | 19 | 135 | 76 | 25 | 16 | 10 |
| 32 | 32 | 25 | 1 | 25 | 1 | 25 | 1 | 120 | ⅛ | 145 | 120 | 160 | 19 | 167 | 93 | 26 | 26 | 13 |
| 40 | 20 | 32 | 1 ¼ | 15 | ½ | 25 | 1 | 120 | ⅛ | 149 | 128 | 180 | 23 | 175 | 101 | 26 | 26 | 13 |
| 40 | 25 | 32 | 1 ¼ | 20 | ¾ | 25 | 1 | 120 | ⅛ | 149 | 128 | 180 | 23 | 175 | 101 | 26 | 26 | 13 |
| 40 | 32 | 32 | 1 ¼ | 25 | 1 | 25 | 1 | 120 | ⅛ | 149 | 128 | 180 | 23 | 175 | 101 | 26 | 26 | 13 |
| 40 | 40 | 32 | 1 ¼ | 32 | 1 ¼ | 25 | 1 | 120 | ⅛ | 174 | 153 | 180 | 23 | 175 | 101 | 26 | 26 | 13 |
| 50 | 20 | 40 | 1 ½ | 15 | ½ | 20 | ¾ | 96 | ⅛ | 160 | 134 | 180 | 27 | 148 | 90 | 25 | 16 | 10 |
| 50 | 25 | 40 | 1 ½ | 20 | ¾ | 25 | 1 | 120 | ⅛ | 160 | 134 | 180 | 28 | 180 | 106 | 26 | 26 | 13 |
| 50 | 32 | 40 | 1 ½ | 25 | 1 | 25 | 1 | 120 | ⅛ | 160 | 134 | 180 | 28 | 180 | 106 | 26 | 26 | 13 |
| 50 | 40 | 40 | 1 ½ | 32 | 1 ¼ | 50 | 2 | 180 | ¼ | 209 | 169 | 209 | 33 | 249 | 135 | 37 | 26 | 23 |
| 50 | 50 | 40 | 1 ½ | 40 | 1 ½ | 50 | 2 | 180 | ¼ | 209 | 169 | 209 | 33 | 249 | 135 | 37 | 26 | 23 |
| 63 | 20 | 50 | 2 | 15 | ½ | 20 | 2 | 96 | ⅛ | 177 | 144 | 180 | 33 | 155 | 96 | 25 | 16 | 10 |
| 63 | 25 | 50 | 2 | 20 | ¾ | 25 | 1 | 120 | ⅛ | 177 | 144 | 180 | 35 | 187 | 113 | 26 | 26 | 13 |
| 63 | 32 | 50 | 2 | 25 | 1 | 25 | 1 | 120 | ⅛ | 177 | 144 | 180 | 35 | 187 | 113 | 26 | 26 | 13 |
| 63 | 40 | 50 | 2 | 32 | 1 ¼ | 50 | 2 | 180 | ¼ | 225 | 192 | 220 | 39 | 255 | 141 | 37 | 26 | 23 |
| 63 | 50 | 50 | 2 | 40 | 1 ½ | 50 | 2 | 180 | ¼ | 225 | 192 | 220 | 39 | 255 | 141 | 37 | 26 | 23 |
| 63 | 63 | 50 | 2 | 50 | 2 | 50 | 2 | 180 | ¼ | 225 | 192 | 220 | 39 | 255 | 141 | 37 | 26 | 23 |
| 90 | 20 | 80 | 3 | 15 | ½ | 25 | 1 | 120 | ⅛ | 205 | 159 | 190 | 47 | 200 | 126 | 26 | 26 | 13 |
| 90 | 25 | 80 | 3 | 20 | ¾ | 25 | 1 | 120 | ⅛ | 205 | 159 | 190 | 47 | 200 | 126 | 26 | 26 | 13 |
| 90 | 32 | 80 | 3 | 25 | 1 | 25 | 1 | 120 | ⅛ | 205 | 159 | 190 | 47 | 200 | 126 | 26 | 26 | 13 |
| 90 | 50 | 80 | 3 | 40 | 1 ½ | 50 | 2 | 180 | ¼ | 254 | 207 | 250 | 51 | 269 | 155 | 37 | 26 | 23 |
| 90 | 63 | 80 | 3 | 50 | 2 | 50 | 2 | 180 | ¼ | 254 | 207 | 250 | 51 | 269 | 155 | 37 | 26 | 23 |
| 110 | 20 | 100 | 4 | 15 | ½ | 25 | 1 | 120 | ⅛ | 227 | 171 | 190 | 56 | 209 | 135 | 26 | 26 | 13 |
| 110 | 25 | 100 | 4 | 20 | ¾ | 25 | 1 | 120 | ⅛ | 227 | 171 | 190 | 56 | 209 | 135 | 26 | 26 | 13 |
| 110 | 32 | 100 | 4 | 25 | 1 | 25 | 1 | 120 | ⅛ | 227 | 171 | 190 | 56 | 209 | 135 | 26 | 26 | 13 |
| 110 | 50 | 100 | 4 | 40 | 1 ½ | 50 | 2 | 180 | ¼ | 276 | 219 | 250 | 60 | 279 | 165 | 37 | 26 | 23 |
| 110 | 63 | 100 | 4 | 50 | 2 | 50 | 2 | 180 | ¼ | 276 | 219 | 250 | 60 | 279 | 165 | 37 | 26 | 23 |

DIASTAR Sixteen FC (Type 514 – 517)

| Dim. (mm) | DN (mm) | Inch (inch) | D (mm) | D1 (inch) | D4 (mm) | D5 (mm) | L(1) (mm) | L(2) (mm) | L(3) (mm) | L(4) (mm) | L(5) (mm) | L(6) (mm) | L(7) (mm) | L(8) (mm) |
|-----------|---------|-------------|--------|-----------|---------|---------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 20 | 15 | ½ | 96 | ⅛ | 65 | 14 | 128 | 128 | 128 | 224 | 196 | 124 | 124 | 124 |
| 25 | 20 | ¾ | 96 | ⅛ | 75 | 14 | 152 | 152 | 152 | 250 | 221 | 144 | 144 | 144 |
| 32 | 25 | 1 | 120 | ⅛ | 85 | 14 | 166 | 166 | 162 | 262 | 234 | 154 | 154 | 154 |
| 40 | 32 | 1 ¼ | 150 | ¼ | 100 | 18 | 192 | 192 | 184 | 296 | 260 | 174 | 174 | 174 |
| 50 | 40 | 1 ½ | 180 | ¼ | 110 | 18 | 222 | 222 | 210 | 328 | 284 | 194 | 194 | 194 |
| 63 | 50 | 2 | 180 | ¼ | 125 | 18 | 266 | 266 | 248 | 370 | 321 | 224 | 224 | 224 |

| Dim. (mm) | DN (mm) | Inch (inch) | L(9) (mm) | L2 (mm) | H (mm) | H1 (mm) | H2 (mm) | H3 (mm) | H4 (mm) | H5 (mm) | H7 (mm) | M | z (mm) | z for L(3) | Hx (mm) |
|-----------|---------|-------------|-----------|---------|--------|---------|---------|---------|---------|---------|---------|----|--------|------------|---------|
| 20 | 15 | ½ | 130 | 25 | 127 | 14 | 12 | 68 | 25 | 16 | 57 | M6 | 96 | 100 | 7 |
| 25 | 20 | ¾ | 150 | 25 | 132 | 18 | 12 | 73 | 25 | 16 | 57 | M6 | 114 | 118 | 10 |
| 32 | 25 | 1 | 160 | 25 | 167 | 22 | 12 | 93 | 26 | 26 | 69 | M6 | 122 | 126 | 13 |
| 40 | 32 | 1 ¼ | 180 | 45 | 196 | 26 | 15 | 101 | 36 | 26 | 88 | M8 | 140 | 144 | 15 |
| 50 | 40 | 1 ½ | 200 | 45 | 239 | 32 | 15 | 124 | 37 | 26 | 103 | M8 | 160 | 164 | 19 |
| 63 | 50 | 2 | 230 | 45 | 251 | 39 | 15 | 137 | 37 | 26 | 103 | M8 | 190 | 194 | 23 |

DIASTAR Sixteen FC (Type 519)

| Dim. (mm) | d1 (mm) | DN (mm) | Inch (inch) | DN1 (mm) | Inch1 (inch) | DN2 (mm) | Inch2 (inch) | D (mm) | D1 (inch) | L(6) (mm) | L1 (mm) | L3 (mm) | L4 (mm) | H (mm) | H3 (mm) | H4 (mm) | H5 (mm) | Hx (mm) |
|-----------|---------|---------|-------------|----------|--------------|----------|--------------|--------|-----------|-----------|---------|---------|---------|--------|---------|---------|---------|---------|
| 20 | 20 | 15 | ½ | 15 | ½ | 15 | ½ | 96 | ⅛ | 117 | 96 | 162 | 12 | 130 | 71 | 25 | 16 | 7 |
| 25 | 20 | 20 | ¾ | 15 | ½ | 20 | ¾ | 96 | ⅛ | 133 | 108 | 162 | 16 | 131 | 72 | 25 | 16 | 10 |
| 25 | 25 | 20 | ¾ | 20 | ¾ | 20 | ¾ | 96 | ⅛ | 133 | 108 | 162 | 16 | 131 | 72 | 25 | 16 | 10 |
| 32 | 20 | 25 | 1 | 15 | ½ | 20 | ¾ | 96 | ⅛ | 142 | 120 | 162 | 19 | 135 | 76 | 25 | 16 | 10 |
| 32 | 25 | 25 | 1 | 20 | ¾ | 20 | ¾ | 96 | ⅛ | 142 | 120 | 162 | 19 | 135 | 76 | 25 | 16 | 10 |
| 32 | 32 | 25 | 1 | 25 | 1 | 25 | 1 | 120 | ⅛ | 145 | 120 | 160 | 19 | 167 | 93 | 26 | 26 | 13 |
| 40 | 20 | 32 | 1 ¼ | 15 | ½ | 25 | 1 | 120 | ⅛ | 149 | 128 | 180 | 23 | 175 | 101 | 26 | 26 | 13 |
| 40 | 25 | 32 | 1 ¼ | 20 | ¾ | 25 | 1 | 120 | ⅛ | 149 | 128 | 180 | 23 | 175 | 101 | 26 | 26 | 13 |
| 40 | 32 | 32 | 1 ¼ | 25 | 1 | 25 | 1 | 120 | ⅛ | 149 | 128 | 180 | 23 | 175 | 101 | 26 | 26 | 13 |
| 40 | 40 | 32 | 1 ¼ | 32 | 1 ¼ | 25 | 1 | 120 | ⅛ | 174 | 153 | 180 | 23 | 175 | 101 | 26 | 26 | 13 |
| 50 | 20 | 40 | 1 ½ | 15 | ½ | 20 | ¾ | 96 | ⅛ | 160 | 134 | 180 | 27 | 148 | 90 | 25 | 16 | 10 |
| 50 | 25 | 40 | 1 ½ | 20 | ¾ | 25 | 1 | 120 | ⅛ | 160 | 134 | 180 | 28 | 180 | 106 | 26 | 26 | 13 |
| 50 | 32 | 40 | 1 ½ | 25 | 1 | 25 | 1 | 120 | ⅛ | 160 | 134 | 180 | 28 | 180 | 106 | 26 | 26 | 13 |
| 50 | 40 | 40 | 1 ½ | 32 | 1 ¼ | 50 | 2 | 180 | ¼ | 209 | 169 | 209 | 33 | 249 | 135 | 37 | 26 | 23 |
| 50 | 50 | 40 | 1 ½ | 40 | 1 ½ | 50 | 2 | 180 | ¼ | 209 | 169 | 209 | 33 | 249 | 135 | 37 | 26 | 23 |
| 63 | 20 | 50 | 2 | 15 | ½ | 20 | 2 | 96 | ⅛ | 177 | 144 | 180 | 33 | 155 | 96 | 25 | 16 | 10 |
| 63 | 25 | 50 | 2 | 20 | ¾ | 25 | 1 | 120 | ⅛ | 177 | 144 | 180 | 35 | 187 | 113 | 26 | 26 | 13 |
| 63 | 32 | 50 | 2 | 25 | 1 | 25 | 1 | 120 | ⅛ | 177 | 144 | 180 | 35 | 187 | 113 | 26 | 26 | 13 |
| 63 | 40 | 50 | 2 | 32 | 1 ¼ | 50 | 2 | 180 | ¼ | 225 | 192 | 220 | 39 | 255 | 141 | 37 | 26 | 23 |
| 63 | 50 | 50 | 2 | 40 | 1 ½ | 50 | 2 | 180 | ¼ | 225 | 192 | 220 | 39 | 255 | 141 | 37 | 26 | 23 |
| 63 | 63 | 50 | 2 | 50 | 2 | 50 | 2 | 180 | ¼ | 225 | 192 | 220 | 39 | 255 | 141 | 37 | 26 | 23 |
| 90 | 20 | 80 | 3 | 15 | ½ | 25 | 1 | 120 | ⅛ | 205 | 159 | 190 | 47 | 200 | 126 | 26 | 26 | 13 |
| 90 | 25 | 80 | 3 | 20 | ¾ | 25 | 1 | 120 | ⅛ | 205 | 159 | 190 | 47 | 200 | 126 | 26 | 26 | 13 |
| 90 | 32 | 80 | 3 | 25 | 1 | 25 | 1 | 120 | ⅛ | 205 | 159 | 190 | 47 | 200 | 126 | 26 | 26 | 13 |
| 90 | 50 | 80 | 3 | 40 | 1 ½ | 50 | 2 | 180 | ¼ | 254 | 207 | 250 | 51 | 269 | 155 | 37 | 26 | 23 |
| 90 | 63 | 80 | 3 | 50 | 2 | 50 | 2 | 180 | ¼ | 254 | 207 | 250 | 51 | 269 | 155 | 37 | 26 | 23 |
| 110 | 20 | 100 | 4 | 15 | ½ | 25 | 1 | 120 | ⅛ | 227 | 171 | 190 | 56 | 209 | 135 | 26 | 26 | 13 |
| 110 | 25 | 100 | 4 | 20 | ¾ | 25 | 1 | 120 | ⅛ | 227 | 171 | 190 | 56 | 209 | 135 | 26 | 26 | 13 |
| 110 | 32 | 100 | 4 | 25 | 1 | 25 | 1 | 120 | ⅛ | 277 | 171 | 190 | 56 | 209 | 135 | 26 | 26 | 13 |
| 110 | 50 | 100 | 4 | 40 | 1 ½ | 50 | 2 | 180 | ¼ | 276 | 219 | 250 | 60 | 279 | 165 | 37 | 26 | 23 |
| 110 | 63 | 100 | 4 | 50 | 2 | 50 | 2 | 180 | ¼ | 276 | 219 | 250 | 60 | 279 | 165 | 37 | 26 | 23 |

Accessories

- Stroke limiter / emergency manual override
- Solenoid pilot Valve type PV94, PV95, MNL532, PV2000
- Feedback – ER55, ER52 and ER53
- Positioner – type SPC
- Bus communication – AS interface

Stroke limiter/Emergency manual override

The stroke limiter for DIASTAR is used to limit the stroke of the DIASTAR pneumatic diaphragm valve after it has been installed, and as a manual override.

| DN (mm) | Six | Ten | TenPlus | Sixteen | Product picture |
|---------|-----|-------------|-------------|-------------|---|
| DN10 | FC | 199 190 381 | | |  |
| | FO | 199 190 381 | | | |
| | DA | 199 190 381 | | | |
| DN15 | FC | 199 190 381 | 199 190 382 | 199 190 382 | |
| | FO | 199 190 381 | | | |
| | DA | 199 190 381 | | | |
| DN20 | FC | 199 190 382 | 199 190 382 | 199 190 382 | |
| | FO | 199 190 382 | | 199 190 382 | |
| | DA | 199 190 382 | | | |
| DN25 | FC | 199 190 382 | 199 190 383 | 199 190 383 | |
| | FO | 199 190 382 | | 199 190 382 | |
| | DA | 199 190 382 | | | |
| DN32 | FC | 199 190 383 | 199 190 384 | 199 190 384 | |
| | FO | 199 190 383 | | 199 190 383 | |
| | DA | 199 190 383 | | | |
| DN40 | FC | 199 190 384 | 199 190 385 | 199 190 385 | |
| | FO | 199 190 384 | | 199 190 384 | |
| | DA | 199 190 384 | | | |
| DN50 | FC | 199 190 384 | 199 190 385 | 199 190 385 | |
| | FO | 199 190 384 | | 199 190 384 | |
| | DA | 199 190 384 | | | |

i For further information on accessories, refer to the online product catalog at www.gfps.com

■ Mobile apps and online tools to support configuration and calculation at www.gfps.com/tools



The information and technical data (altogether "Data") herein are not binding, unless explicitly confirmed in writing. The Data neither constitutes any expressed, implied or warranted characteristics, nor guaranteed properties or a guaranteed durability. All Data is subject to modification. The General Terms and Conditions of Sale of Georg Fischer Piping Systems apply.

02/2025-A

© Georg Fischer Piping Systems Ltd, 8201 Schaffhausen/Switzerland
Tel. +41 52 631 11 11 • www.gfps.com • E-Mail: info.ps@georgfischer.com