

3/2- and 5/2-way pilot valve MNL532



Product description

3/2 and 5/2-way solenoid valve for activating a double-acting pneumatic actuator. The mounting takes place via a NAMUR connection. For the dimensions of the DIASTAR series DN15 – DN50 and our pneumatic actuators PA11/21 a NAMUR connection plate must be used between the actuator and the solenoid pilot valve.


Benefits/features

- Easy change over from 5/2- to 3/2-ways operation by innovative sealing plate
- Single stable version
- Manual override

Technical data

Specification	
Air connection	G $\frac{1}{4}$ "
Dimension	5.5 mm
Air pressure	2 – 10 bar
Temperature	-10 °C – +50 °C
Protection rating	IP67 per DIN40050
Voltage (V AC) / Power consumption	230 V / 5 VA, 115 V / 5 VA, 48 V / 5 VA, 24 V / 5 VA
Voltage (V DC) / Power consumption	24 V / 3 W
Air flow	950 l/min
Product standard	IEC 61508-2
Test standard	IEC 61508-2
Approvals	SIL


Sealing plate

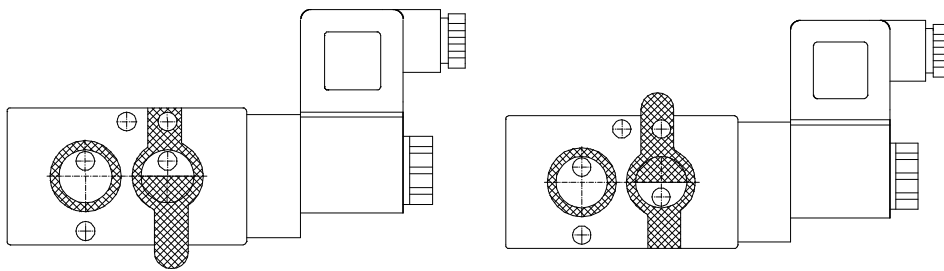

5/2- ways function

3/2- ways function

Dimensions

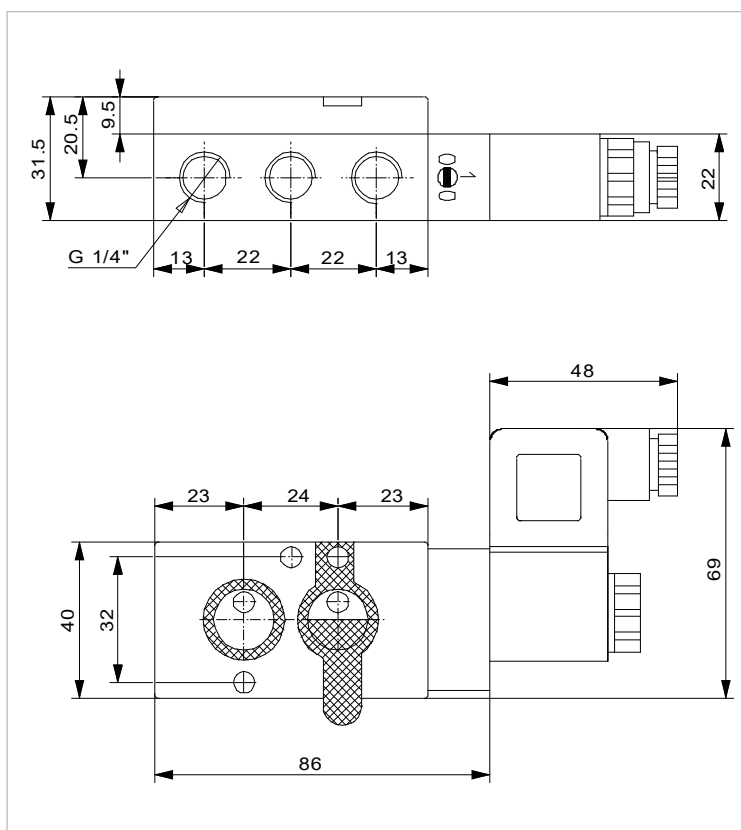

The information and technical data (altogether "Data") herein are not binding, unless explicitly confirmed in writing. The Data neither constitutes any expressed, implied or warranted characteristics, nor guaranteed properties or a guaranteed durability. All Data is subject to modification. The General Terms and Conditions of Sale of Georg Fischer Piping Systems apply.

07/2023-A

© Georg Fischer Piping Systems Ltd, 8201 Schaffhausen/Switzerland

Tel. +41 52 631 11 11 • www.gfps.com • E-Mail: info.ps@georgfischer.com