

JRG Valves

JRG Fine Filter

Technical Documentation



JRG Fine Filter



- 1 Hand wheel
- 2 Filter valves
- 3 Pressure gage connection
- 4 Fine filter (bypass)
- 5 Valve seal
- 6 Filter cup
- 7 O-ring
- 8 Screw collar
- 9 Transparent or gunmetal filter cup
- 10 Filter element
- 11 Insert
- 12 Drain valve
- 13 Cap

Benefits

- Gunmetal filter housing
- Filter cup from high-grade transparent plastic (nominal pressure PN 16) or gunmetal (nominal pressure PN 25)
- Simple removal of the filter cup
- Separate threaded ring
- Filter cup with integrated drain valve
- Drain valve with hose fitting
- Fine filter with PN 16 transparent cups can be mounted upstream of the pressure reducer

In the service of safety

Particulate matter such as limescale, rust, sand, etc. can enter the domestic water distribution network via the building connection pipe due to repairs, renovations, etc. on the public supply network.


If this particulate matter washes in, the function of installed fittings, such as pressure reducing, safety and check valves, can be compromised and the entire domestic supply network is at risk as well.

Various types of corrosion in the piping system, as well as malfunctions on drain fittings, can be traced back to this source.


Unpleasant incidents like these can be reduced or almost eliminated altogether by installing a JRG fine filter.

The JRG fine filter serves only to filter the water. It is no substitute at all for the desired or required water treatment processes (decalcification, sterilization, etc.).

Installation example

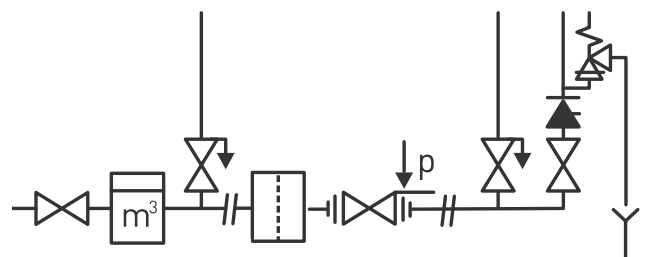

Products

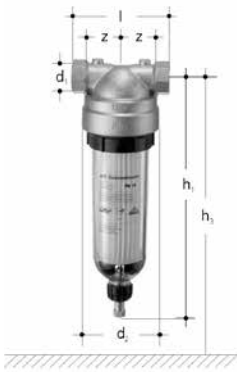

JRG Fine filter gunmetal Female thread

- Temperature: max. 30°C
- Material: gunmetal, EPDM, plastic
- Connection: female thread

DN (mm)	GN (inch)	Size (inch)	JRG Code	GF Code	Weight (kg)
25	1	1	1830.400	350 690 001	3.000
32	1 ¼	1 ¼	1830.480	350 690 002	3.150
40	1 ½	1 ½	1830.560	350 690 003	3.200
50	2	2	1830.640	350 690 004	3.450

DN (mm)	d1 (inch)	Rp (mm)	d2 (mm)	h1 (mm)	h3 (mm)	l (mm)	PN (bar)	z (mm)	µm
25	1	122	370	430	130	16	48	100	
32	1 ¼	122	372	432	150	16	56	100	
40	1 ½	122	374	434	150	16	56	100	
50	2	122	380	440	160	16	56	100	




JRG Fine filter gunmetal Female thread

- Temperature: strainers 1838 max. 30°C / 1839 max. 70°C
- Material: gunmetal
- Connection: female thread

DN (mm)	GN (inch)	Size (inch)	JRG Code	GF Code	Weight (kg)
25	1	1	1836.400	350 690 101	5.300
32	1 ¼	1 ¼	1836.480	350 690 102	5.450
40	1 ½	1 ½	1836.560	350 690 103	6.050
50	2	2	1836.640	350 690 104	5.900

DN (mm)	d1 (inch)	Rp (mm)	d2 (mm)	h1 (mm)	h3 (mm)	l (mm)	PN (bar)	z (mm)	µm
25	1	122	370	430	130	25	48	100	
32	1 ¼	122	372	432	150	25	56	100	
40	1 ½	122	374	434	150	25	56	100	
50	2	122	380	440	160	25	56	100	

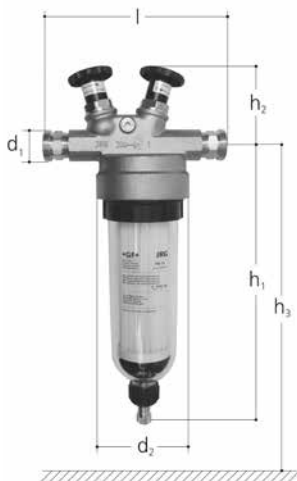


JRG LegioStop fine filter gunmetal Male thread with by-pass

- Temperature: max. 30°C
- Material: gunmetal, stainless steel, EPDM, plastic
- Connection: male thread


DN (mm)	GN (inch)	Size (inch)	JRG Code	GF Code	Weight (kg)
25	1	1	1840.025	350 690 209	3.750
32	1 ¼	1 ¼	1840.032	350 690 210	4.640
40	1 ½	1 ½	1840.040	350 690 211	3.980
50	2	2	1840.050	350 690 212	3.980

DN (mm)	d1 G (inch)	d2 (mm)	h1 (mm)	h2 (mm)	h3 (mm)	l (mm)	PN (bar)	µm
25	1 ¼	122	367	102	428	228	16	100
32	1 ½	122	373	112	433	242	16	100
40	1 ¾	122	376	122	436	260	16	100
50	2 ¾	122	382	133	442	293	16	100

Nomogram JRG Fine Filter 1830, 1836

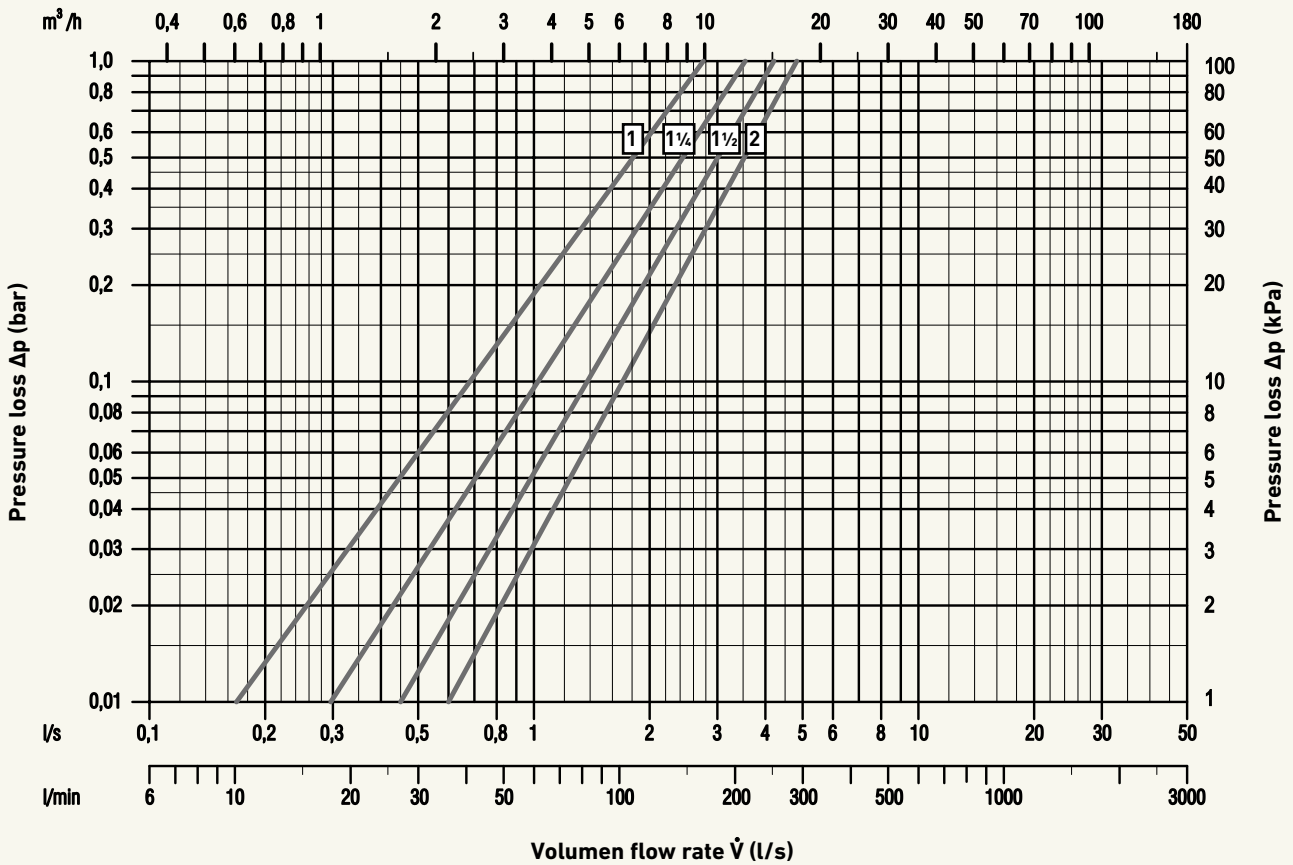

Nomogram JRG Fine Filter 1840, 1846

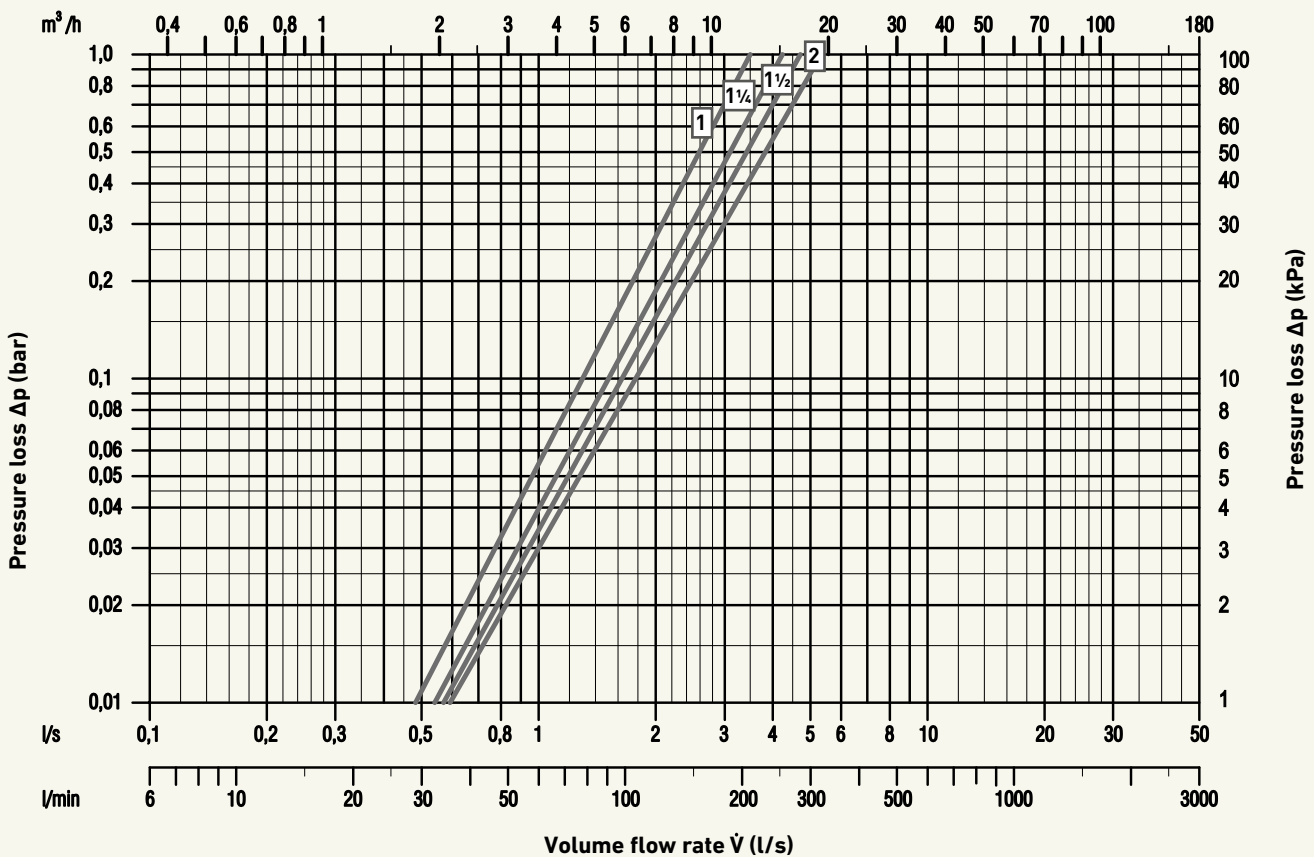

Products




JRG LegioStop fine filter gunmetal Female thread with by-pass

- Temperature: max. 30°C
- Material: gunmetal, stainless steel, EPDM, plastic
- Connection: female thread

DN (mm)	GN (inch)	Size (inch)	JRG Code	GF Code	Weight (kg)
25	1	1	1840.400	350 690 201	3.980
32	1 ¼	1 ¼	1840.480	350 690 202	4.490
40	1 ½	1 ½	1840.560	350 690 203	5.990
50	2	2	1840.640	350 690 204	6.490

DN (mm)	d1 (inch)	Rp (mm)	d2 (mm)	h1 (mm)	h2 (mm)	h3 (mm)	l (mm)	PN (bar)	z1 (mm)	z2 (mm)	µm
25	1	122	368	102	428	170	16	78	58	100	
32	1 ¼	122	373	112	433	180	16	86	56	100	
40	1 ½	122	376	122	436	190	16	96	56	100	
50	2	122	382	133	442	220	16	111	61	100	

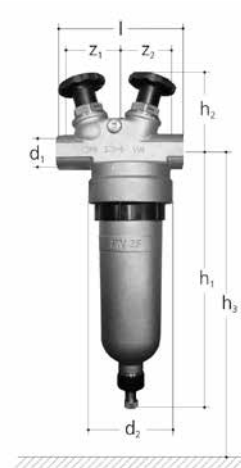

JRG LegioStop fine filter gunmetal with by-pass

- Temperature: strainers 1838 max. 30°C / 1839 max. 70°C
- Material: gunmetal, stainless steel, EPDM, plastic
- Connection: female thread

DN (mm)	GN (inch)	Size (inch)	JRG Code	GF Code	Weight (kg)
25	1	1	1846.400	350 690 301	6.350
32	1 ¼	1 ¼	1846.480	350 690 302	7.100
40	1 ½	1 ½	1846.560	350 690 303	8.420
50	2	2	1846.640	350 690 304	9.220

DN (mm)	d1 (inch)	Rp (mm)	d2 (mm)	h1 (mm)	h2 (mm)	h3 (mm)	l (mm)	PN (bar)	z1 (mm)	z2 (mm)	µm
25	1	122	368	102	428	170	25	78	58	100	
32	1 ¼	122	373	112	433	180	25	86	56	100	
40	1 ½	122	376	122	436	190	25	96	56	100	
50	2	122	382	133	442	220	25	111	61	100	

Products




Slanted filter grey cast iron Plastic coated flange

- Description: dismantling distance fine filter 2 x h1
- Temperature: max. 90°C
- Material: grey cast iron, plastic coated, rust-free steel
- Connection: flange

DN (mm)	d (mm)	JRG Code	GF Code	Weight (kg)	d1 (mm)	d2 (mm)	h1 (mm)	l (mm)	PN (bar)	○	µm
65	65	1850.065	355 635 564	15.000	65	185	179	290	16	4	500
80	80	1850.080	355 635 565	22.000	80	200	203	310	16	8	500
100	100	1850.100	355 635 566	30.000	100	220	220	350	16	8	500


Spare Parts



Filter element

- Description: to 1350-1363, 1830-1846
- Temperature: max. 30°C
- Material: PES fleece
- * as long as stock last


d (mm)	JRG Code	GF Code	Weight (kg)	h (mm)	µm
70	1838.020	350 590 102	0.150	250	20
70	1838.050	350 590 202	0.150	250	50
*	1838.150	350 590 302	0.150	250	150



Filter element, standard

- Description: to 1350-1363, 1830-1846
- Temperature: max. 30°C
- Material: monofilament

d (mm)	JRG Code	GF Code	Weight (kg)	h (mm)	µm
70	1838.100	350 588 702	0.150	250	100



Filter element

- Description: to 1350-1363, 1830-1846
- Temperature: max. 70°C
- Material: stainless steel

d (mm)	JRG Code	GF Code	Weight (kg)	h (mm)	µm
70	1839.001	350 590 502	0.120	250	1000
70	1839.050	350 588 202	0.435	250	50
70	1839.100	350 590 514	0.250	250	100

Spare Parts



Filter cup

- Description: to 1350, 1353, 1830, 1840
- Material: plastic, EPDM

JRG Code	GF Code	Weight (kg)	PN (bar)
1848.000	350 584 101	0.840	16



Filter cup

- Description: to 1360, 1363, 1836, 1846
- Material: gunmetal, EPDM, plastic

JRG Code	GF Code	Weight (kg)	PN (bar)
1849.000	355 618 202	3.700	25



Fine filter key

- Description: to 1830, 1849
- Material: plastic

d (mm)	JRG Code	GF Code	Weight (kg)	h (mm)
113	8127.000	355 591 401	0.080	190


Accessories



Manometer

- Consisting of: indicator

GN (inch)	DN (mm)	JRG Code	GF Code	Weight (kg)	d (mm)	d1 R (inch)	h (mm)	h1 (mm)	PN (bar)
¼	8	8108.080	350 794 801	0.143	63	¼	50	12	0 - 15



Manometer

- Consisting of: indicator

GN (inch)	DN (mm)	JRG Code	GF Code	Weight (kg)	d (mm)	d1 R (inch)	l (mm)	l1 (mm)	PN (bar)
¼	8	8109.080	350 581 101	0.020	63	¼	48	12	0 - 15

Worldwide at home

Our sales companies and representatives ensure local customer support in over 100 countries.

www.gfps.com

Argentina / Southern South America

Georg Fischer Central Plastics Sudamérica S.R.L.
Buenos Aires / Argentina
Phone +54 11 4512 02 90
Fax +54 11 4512 02 93
gfccentral.ps.ar@georgfischer.com
www.gfps.com/ar

Australia

George Fischer Pty Ltd
Riverwood NSW 2210
Phone +61 (0) 2 9502 8000
Fax +61 (0) 2 9502 8090
australia.ps@georgfischer.com
www.gfps.com/au

Austria

Georg Fischer Rohrleitungssysteme GmbH
3130 Herzogenburg
Phone +43 (0) 2782 856 43 0
Fax +43 (0) 2782 856 64
austria.ps@georgfischer.com
www.gfps.com/at

Belgium / Luxembourg

Georg Fischer NV/SA
1600 Sint-Pieters-Leeuw / Belgium
Phone +32 (0) 2 556 40 20
Fax +32 (0) 2 524 34 26
be.ps@georgfischer.com
www.gfps.com/be

Brazil

Georg Fischer Sist. de Tub. Ltda.
04571-020 São Paulo/SP
Phone +55 (0) 11 5525 1311
br.ps@georgfischer.com
www.gfps.com/br

Canada

Georg Fischer Piping Systems Ltd
Mississauga, ON L5T 2B2
Phone +1 (905) 670 8005
Fax +1 (905) 670 8513
ca.ps@georgfischer.com
www.gfps.com/ca

China

Georg Fischer Piping Systems Ltd
201319 Shanghai
Phone +86 21 3899 3899
Fax +86 21 3899 3888
china.ps@georgfischer.com
www.gfps.com/cn

Denmark / Iceland

Georg Fischer A/S
2630 Taastrup / Denmark
Phone +45 (0) 7022 1975
Fax +45 (0) 7022 1976
info.dk.ps@georgfischer.com
www.gfps.com/dk

Finland

Georg Fischer AB
01510 Vantaa
Phone +358 (0) 9 586 58 25
Fax +358 (0) 9 586 58 29
info.fi.ps@georgfischer.com
www.gfps.com/fi

France

Georg Fischer SAS
95932 Roissy Charles de Gaulle Cedex
Phone +33 (0) 1 41 84 68 84
Fax +33 (0) 1 41 84 68 85
fr.ps@georgfischer.com
www.gfps.com/fr

Germany

Georg Fischer GmbH
73095 Albershausen
Phone +49 (0) 7161 302 0
Fax +49 (0) 7161 302 25 9
info.de.ps@georgfischer.com
www.gfps.com/de

India

Georg Fischer Piping Systems Pvt. Ltd.
400 076 Powai, Mumbai
Phone +91 22 4007 2000
Fax +91 22 4007 2020
branchoffice@georgfischer.com
www.gfps.com/in

Indonesia

PT Georg Fischer Indonesia
Karawang 41371, Jawa Barat
Phone +62 267 432 044
Fax +62 267 431 857
indonesia.ps@georgfischer.com
www.gfps.com/id

Italy

Georg Fischer S.p.A.
20864 Agrate Brianza (MB)
Phone +39 02 921 86 1
Fax +39 02 921 86 24 7
it.ps@georgfischer.com
www.gfps.com/it

Japan

Georg Fischer Ltd
530-0003 Osaka
Phone +81 (0) 6 6341 2451
jp.ps@georgfischer.com
www.gfps.com/jp

Korea

Georg Fischer Piping Systems
463-824 Seoul
Phone +82 31 8017 1450 3
Fax +82 31 8017 1454
kor.ps@georgfischer.com
www.gfps.com/kr

Malaysia

George Fischer (M) Sdn. Bhd.
41200 Klang, Selangor Darul Ehsan
Phone +60 (0) 3 3122 5585
Fax +60 (0) 3 3122 5575
my.ps@georgfischer.com
www.gfps.com/my

Mexico / Northern Latin America

Georg Fischer S.A. de C.V.
CP 66636 Apodaca, Nuevo Leon / Mexico
Phone +52 (81) 1340 8586
Fax +52 (81) 1522 8906
mx.ps@georgfischer.com
www.gfps.com/mx

Middle East

Georg Fischer Piping Systems (Switzerland) Ltd
Dubai / United Arab Emirates
Phone +971 4 289 49 60
Fax +971 4 289 49 57
gss.ps@georgfischer.com
www.gfps.com/int

Netherlands

Georg Fischer N.V.
8161 PA Epe
Phone +31 (0) 578 678 222
Fax +31 (0) 578 621 768
nl.ps@georgfischer.com
www.gfps.com/nl

New Zealand

Georg Fischer Ltd
5140 Upper Hutt
Phone +64 (0) 4 527 9813
Fax +64 (0) 4 527 9834
nz.ps@georgfischer.com
www.gfps.com/nz

Norway

Georg Fischer AS
1351 Rud
Phone +47 67 18 29 00
Fax +47 67 13 92 92
no.ps@georgfischer.com
www.gfps.com/no

Philippines

Georg Fischer Pte. Ltd.
Philippines Representative Office
1500 San Juan City
Phone +632 571 2365
Fax +632 571 2368
sgp.ps@georgfischer.com
www.gfps.com/sg

Poland

Georg Fischer Sp. z o.o.
05 090 Sekocin Nowy
Phone +48 (0) 22 3131 050
Fax +48 (0) 22 3131 060
poland.ps@georgfischer.com
www.gfps.com/pl

Romania

Georg Fischer Rohrleitungssysteme (Elvetia)
S.A. SUCURSALA BUCURESTI
020257 Bucuresti
Phone +40 311 040 492
Fax +40 212 317 479
ro.ps@georgfischer.com
www.gfps.com/int

Russia

Georg Fischer Piping Systems (Switzerland) Ltd
Moscow Representative Office
125040 Moscow
Phone +7 495 748 11 44
ru.ps@georgfischer.com
www.gfps.com/ru

Singapore

Georg Fischer Pte Ltd
528 872 Singapore
Phone +65 6747 0611
Fax +65 6747 05 77
sgp.ps@georgfischer.com
www.gfps.com/sg

Spain / Portugal

Georg Fischer S.A.
28046 Madrid / Spain
Phone +34 (0) 91 781 98 90
Fax +34 (0) 91 426 08 23
es.ps@georgfischer.com
www.gfps.com/es

Sweden

Georg Fischer AB
11743 Stockholm
Phone +46 (0) 8 506 77 50 0
Fax +46 (0) 8 749 23 70
info.se.ps@georgfischer.com
www.gfps.com/se

Switzerland

Georg Fischer Rohrleitungssysteme (Schweiz) AG
8201 Schaffhausen
Phone +41 (0)52 631 3026
Fax +41 (0)52 631 2800
ch.ps@georgfischer.com
www.gfps.com/ch

Taiwan

Georg Fischer Co. Ltd.
24158 New Taipei City
Phone +886 2 8512 2822
Fax +886 2 8512 2823
tw@georgfischer.com
www.gfps.com/tw

Turkey

Georg Fischer Hakan Plastik
Boru ve Profil San. Tic. A.Ş.
59500 Cerkezkoy / Tekirdag
Phone +90 282 726 64 43
Fax +90 282 726 94 67
hpsales@hakan.com.tr
www.hakan.com.tr

United Kingdom / Ireland

Georg Fischer Sales Ltd
CV2 2ST Coventry / United Kingdom
Phone +44 (0) 2476 535 535
Fax +44 (0) 2476 530 450
uk.ps@georgfischer.com
www.gfps.com/uk

USA / Caribbean

Georg Fischer LLC
92618 Irvine, CA / USA
Phone +1 714 731 88 00
Fax +1 714 731 62 01
Toll Free 800/854 40 90
us.ps@georgfischer.com
www.gfps.com/us

Vietnam

Georg Fischer Pte Ltd
Representative Office
Ho Chi Minh City
Phone +84 28 3948 4000
Fax +84 28 3948 4010
sgp.ps@georgfischer.com
www.gfps.com/vn

International

Georg Fischer Piping Systems (Switzerland) Ltd
8201 Schaffhausen / Switzerland
Phone +41 (0) 52 631 3003
Fax +41 (0) 52 631 2893
info.export@georgfischer.com
www.gfps.com/int

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.



37 271 00
e / 01.22 /
© Georg Fischer JRG AG
Hauptstrasse 130
CH-4450 Sissach/Switzerland
Telefon +41 (0) 61 975 22 22
info.jrg.ps@georgfischer.com
Printed in Switzerland